

# VDO TPMS Pro

## User manual

38/2016 (1.2) - UK



---

## REVISION OF THE ATEQ VDO TPMS PRO MANUAL

---

*Due to continuing improvements, the information contained in this user manual, the features and design of this device are subject to be changed without prior notice.*

<b><u>Edition/ Revision</u></b>	<b><u>Reference</u></b>	<b><u>Date</u> (week/year)</b>	<b><u>Chapters updated</u></b>
First edition	UM-366EVB-U	39/2014	European VDO version
Second edition	UM-366EVC-U	29/2015	Evolution of the firmware to DV1-08.
Third edition	UM-366EVD-U	37/2016	Evolution of the firmware to DV1-16.

# TABLE OF CONTENTS

<b>User guide</b>	<b>2</b>
<b>VDO TPMS PRO TOOL .....</b>	<b>2</b>
1. SPECIFICATIONS .....	2
2. IMPORTANT SAFETY INSTRUCTIONS.....	3
3. CAUTION .....	4
4. FUNCTION KEYS .....	5
5. POWER ON.....	7
6. OPERATING INSTRUCTIONS.....	8
<b>VDO TPMS PRO USE.....</b>	<b>9</b>
1. CHECK SENSOR .....	9
2. SERVICE TPMS.....	18
3. PROGRAM BLANK SENSOR.....	28
4. SEARCH MENU.....	38
5. HISTORY.....	42
6. SETTINGS.....	44
7. TRAINING .....	50
<b>MISCELLANEOUS .....</b>	<b>51</b>
1. CHARGE .....	51
2. PRINT SENSOR DETAILS.....	52
3. TROUBLESHOOTING.....	53
4. TOOL UPDATE.....	53
5. FACTORY RESET FOR PROGRAMMABLE SENSOR CHANGE.....	55
6. SAFETY BATTERY AND CHARGE INFORMATION .....	56
7. RECYCLING .....	57
<b>Index</b>	<b>58</b>

# User guide

# VDO TPMS PRO TOOL

## 1. SPECIFICATIONS

<b>Battery Type:</b>	Rechargeable Lithium Ion
<b>Battery Life:</b>	Approximately 800 activations per full charge.
<b>Dimensions (Max. L,W,D):</b>	7.9" x 4.7" x 1.6" (20.0 cm x 12.0 cm x 4.0 cm).
<b>Case Material:</b>	High Impact ABS.
<b>Response Frequency:</b>	Main frequencies: 315 MHz and 433.92 MHz (supporting most specific frequencies).
<b>Low Battery Indication:</b>	LCD bar graph display.
<b>Weight:</b>	Approx. 2 lbs.
<b>Temperatures:</b>	Operating: -4° F to 131° F (-20° C to +45° C). Storage: -4° F to 131° F (-20° C to +45° C).



### Product content:

- VDO TPMS Pro Instrument.
- USB cable.
- RJ45 cable.
- OBDII Module.
- Power supply.

### Option accessories:

- Docking Station (option).
- IrDA Printer (option).

## 2. IMPORTANT SAFETY INSTRUCTIONS

**Do not discard. Retain for future reference.**

This device complies with:

- |                            |                           |
|----------------------------|---------------------------|
| - Part 15 of the FCC Rules | FCC ID: 2ABSJ-VT56025     |
|                            | FCC ID: W70ZG2100-ZG22101 |
|                            | FCC ID: T9J-RN42          |
| - CE / CEM standards       |                           |
| - ROHS standards           |                           |

Operation is subject to the following two conditions:

- (1) This device will not cause harmful interference, and
- (2) This device will accept any interference received, including interference that may cause undesired or improper operation.

**WARNING:** This product emits electromagnetic and electronically generated waves that may interfere with the safe operation of **pacemakers**.

*Individuals that have pacemakers should never use this product.*



**WARNING:**



**Do not use on live electrical circuits.**

**Must read instructions before use.**

**Wear safety goggles. (User and bystanders).**

**Risk of entanglement.**

**Read the Warranty, Safety and Recycling information at the end of this user guide.**

### 3. CAUTION

#### **READ THESE INSTRUCTIONS BEFORE USING**

Your Tire Pressure Monitoring (TPM) tool has been designed to be durable, safe, and reliable when properly used.

All **VDO TPMS PRO TOOLS** are intended to be used only by qualified and trained automotive technicians or a in light industrial repair shop environment. Please read all instructions below before using. Always follow these safety instructions. If you have any questions pertaining to the safe or reliability use of this tool, please call your local dealer.

##### **1. Read All Instructions**

All warnings on the tool and in this manual should be adhered to. All operating instructions should be followed.

##### **2. Retain Instructions**

The safety and operating instructions should be retained for future reference.

##### **3. Heed Warnings**

User and bystanders must wear safety goggles and must read instructions before use. Do not use on live electrical circuits, risk of entanglement.

##### **4. Cleaning**

Clean with a soft dry cloth, or if necessary, a soft damp cloth. Do not use any harsh chemical solvents such as acetone, thinner, brake cleaner, alcohol, etc as this may damage the plastic surface.

##### **5. Water & Moisture**

Do not use this tool where contact or immersion in water is a possibility. Never spill liquid of any kind onto the tool.









##### **6. Storage**

Do not use or store the tool in an area where it is exposed to direct sunlight or excessive moisture.

##### **7. Use**

To reduce the risk of fire, do not operate the tool in the vicinity of open containers or flammable liquids. Do not use if the potential for explosive gas or vapors exists. Keep the tool away from heat generating sources. Do not operate the tool with the battery cover removed.

**4. FUNCTION KEYS**

	Power ON /OFF switch		Test or trigger sensor.
	Next, continue or confirm.		Cancel, previous step.
	Navigate to select " <b>up</b> ".		Navigate to select " <b>down</b> ".
	Navigate to select " <b>left</b> ".		Navigate to select " <b>right</b> ".



**4.1. HEADER ICONS**

The tool is plugged on USB.



The OBD module is plugged to the tool.



The Bluetooth is on (not available).



The Wifi is on (not available).

Wifi signal strength = 100%; = 66%; = 33%.



A message is arrived (not available).



SD card is inserted.



Battery status.

**4.2. BOTTOM ICONS**

Back to home page.



Select to send sensor data to ECU.



Delete current sensor data displayed.



Send sensor data to the printer.



Edit job info.



Clone sensors.




Save vehicle data to history. (14-06)



Back to the vehicle data screen.



## 5. POWER ON


Press  key to turn on device, the **VDO TPMS PRO TOOL**.


The tool displays the start screen.



Wait a few seconds and the tool displays the main menu.

The tool is ready to operate.

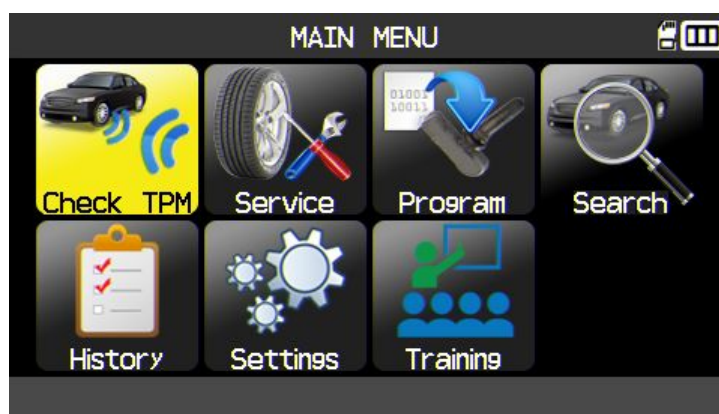

To power off the tool, press and hold (about 3 seconds) the  key.

## 6. OPERATING INSTRUCTIONS

### 6.1. VDO TPMS PRO TOOL OVERVIEW

Read and diagnose sensors, **OBDII ECU** reset and transfer data to **ECU**.



**Note:** With some vehicles, if the vehicle is in “learn mode” the vehicle will also confirm that the TPM sensor has communicated to the ECM with a series of horn beeps.

### Service Procedure

#### Section 1.0: Read Sensor Test

Before servicing the tires/wheels, using your **VDO TPMS PRO TOOL**, trigger each of the vehicle's sensors to make sure they are working properly.



This will eliminate the liability associated with replacing previously damaged or defective sensors. This procedure will not change the vehicle settings because the vehicle has yet to be put into learn/retraining mode. This procedure allows you to quickly identify damaged or defective sensors, because some vehicles do not report a damaged or defective sensor condition on the instrument cluster for up to 20 minutes.

**Note:** If the sensors do not trigger, please refer to the Troubleshooting section of this Guide.

Perform tire/wheel service.

For vehicles that require retraining, please see to Section 2.0

#### Section 2.0: Learning TPM System


With the vehicle in learn mode, begin by triggering the driver's front left (LF) wheel sensor. Some vehicles will provide an audible chirp confirming that the sensor ID has been learned by the vehicle on board computer.



The communication between the sensor and the on board computer is also confirmed on LCD display of the **TOOL**.

The same procedure should be followed on all wheel sensors, in a clockwise rotation, until all the vehicle sensors have been retrained.

After triggering the driver's rear wheel sensor, some vehicles will chirp twice indicating that the TPM system has been retrained.



**Fig. 1**

For vehicles that do not require retraining, we recommend you trigger each wheel sensor, one final time, to make sure they are working correctly prior to releasing the vehicle to the customer.

## VDO TPMS PRO USE

### IMPORTANT:

Vehicle specific information in this manual is used as an example and may not represent specific instructions each make and model may require. When performing various functions with the tool, it is important to refer to the on-screen prompts and/or repair manual information.


**Warning!** For best sensor triggering, hold the tool against the tire sidewall right above the sensor.



### 1. CHECK SENSOR




This is to trigger all the sensors on the vehicle and reprogram the id's in the ECU through OBD port.

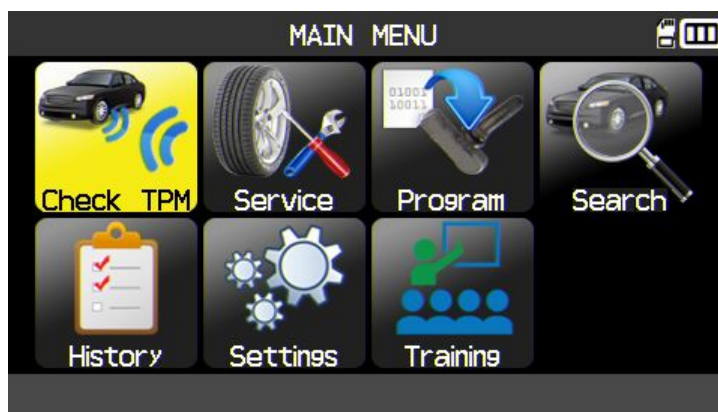


### 1.1. SELECT THE MMY SELECTION MODE


US version only or America zone selected. This is to choose the MMY selection mode manually or with the VIN bar code of the vehicle.

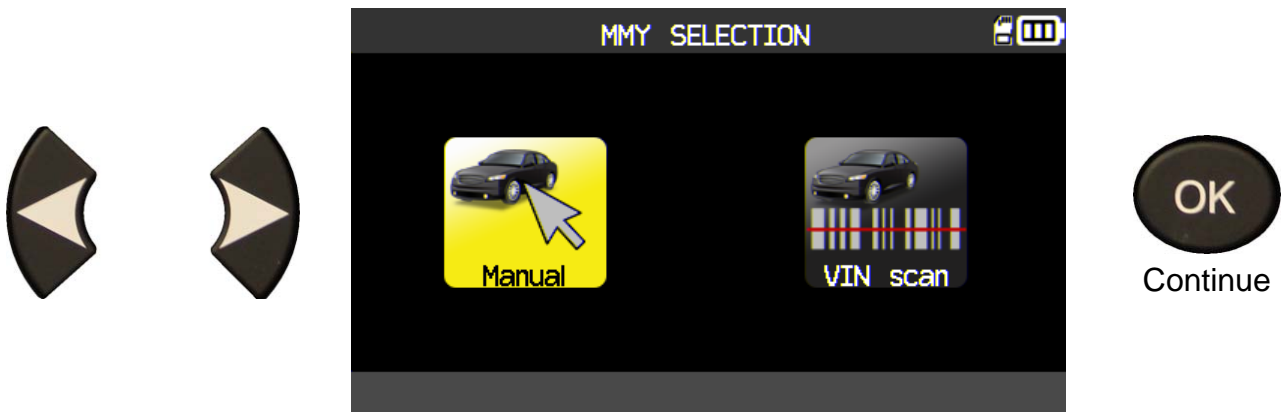



### 1.2. SELECT CAR MANUFACTURER

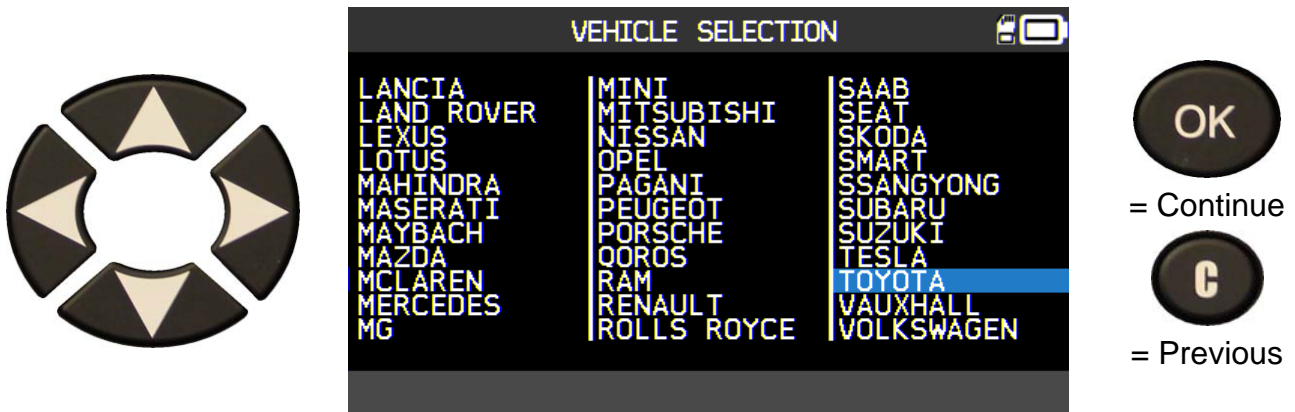

### 1.3. SELECT VEHICLE MODEL

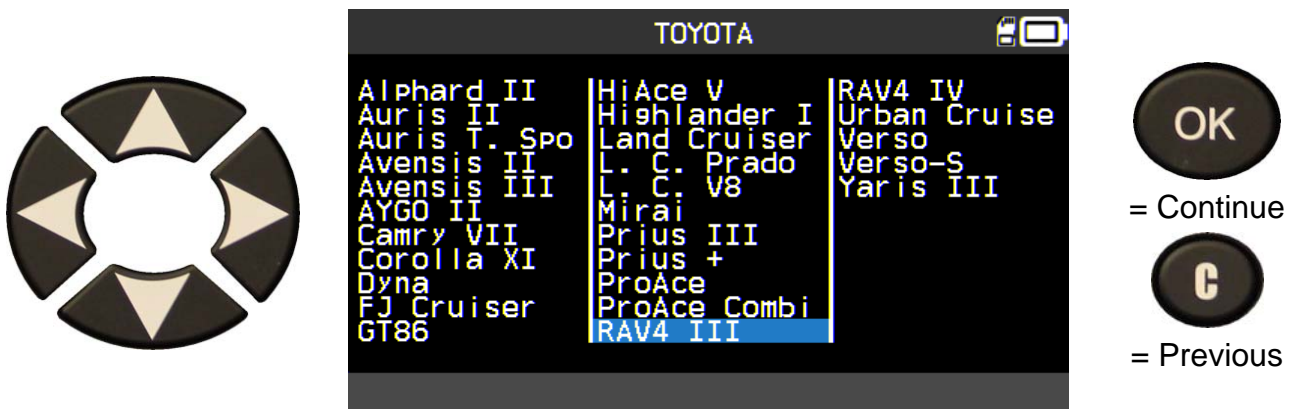


## 1.1. SELECT YEAR







If year is unknown,  
select the  
**VIN** button.


The following  
screen displays the  
VIN location on the  
vehicle.



Check the 10<sup>th</sup>  
character of the VIN  
and select it.

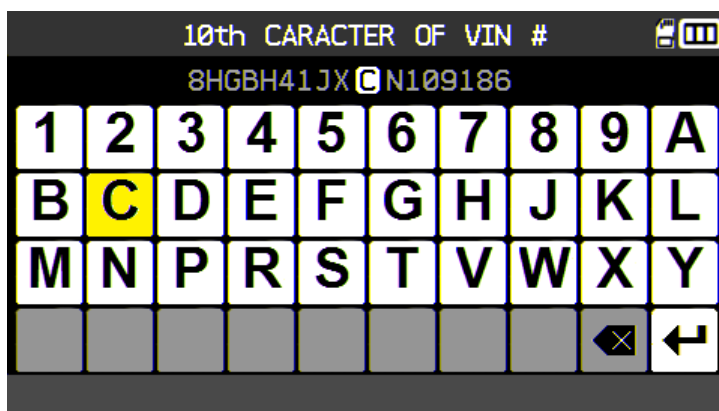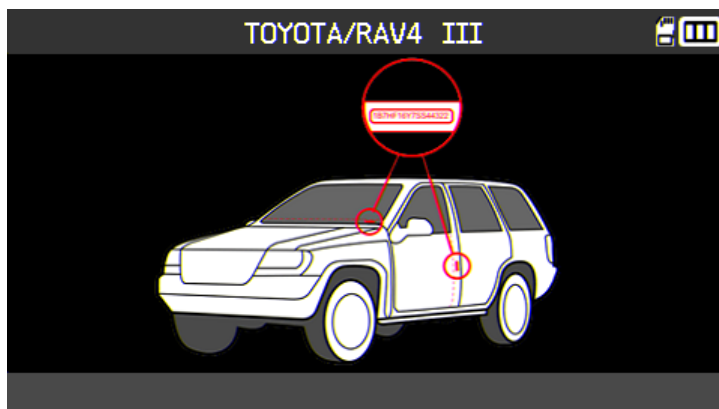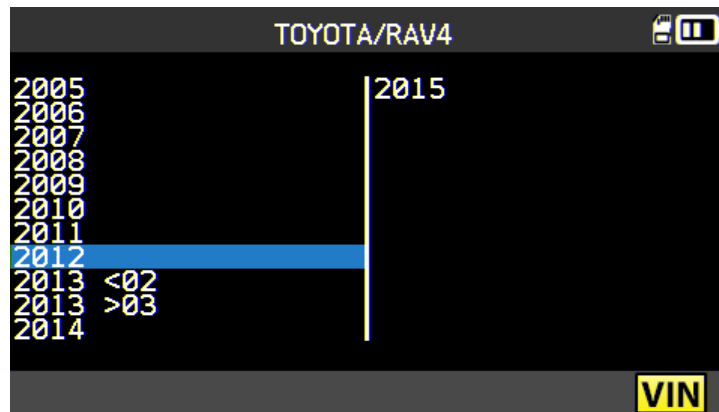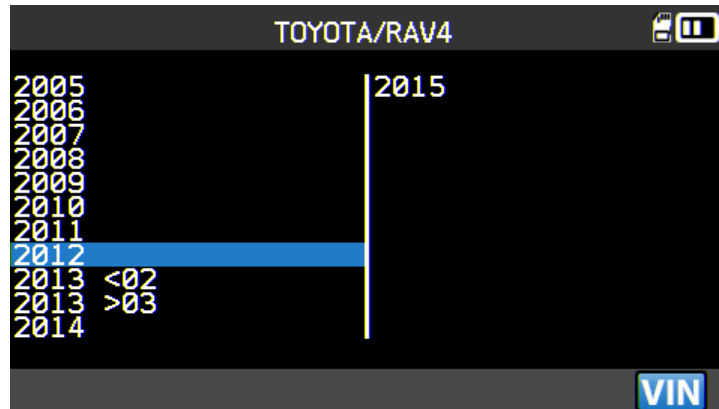

Confirm the selection.

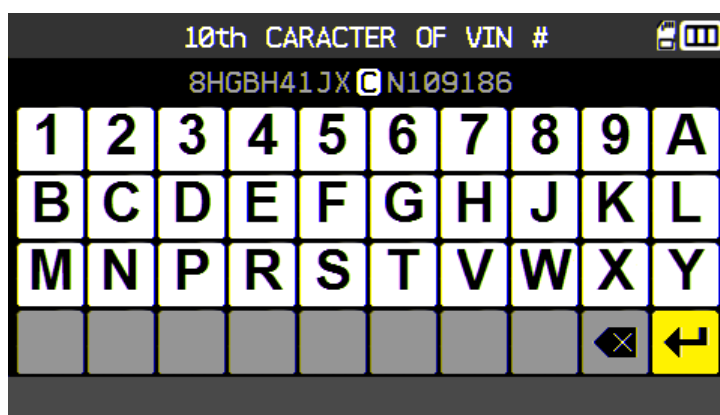


= Continue



= Previous

The device confirms the year.

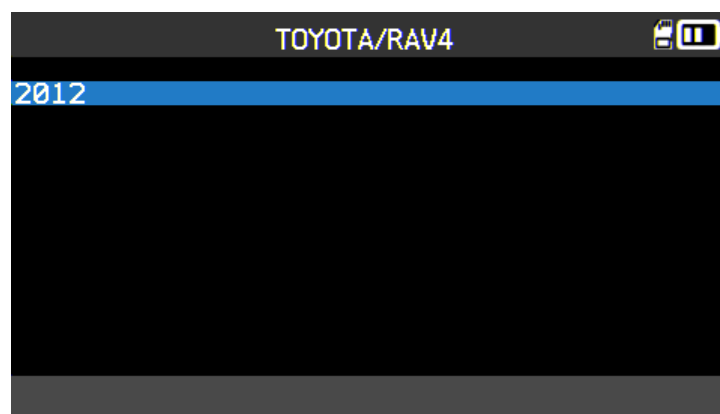


= Continue



= Previous

### 1.1. SELECT THE NUMBER OF WHEELS

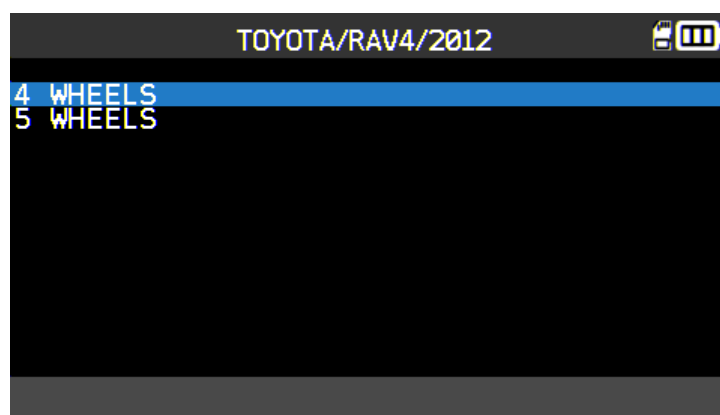

= Continue



= Previous




## 1.2. TEST SENSORS


The tool is ready to trigger sensors.



To scroll wheels.

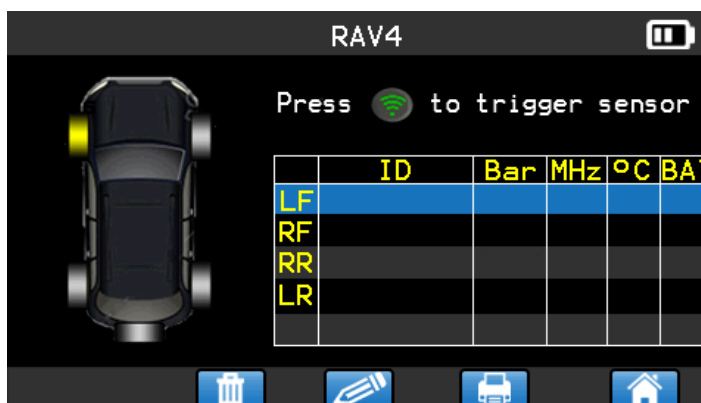

The tool is triggering the sensor.

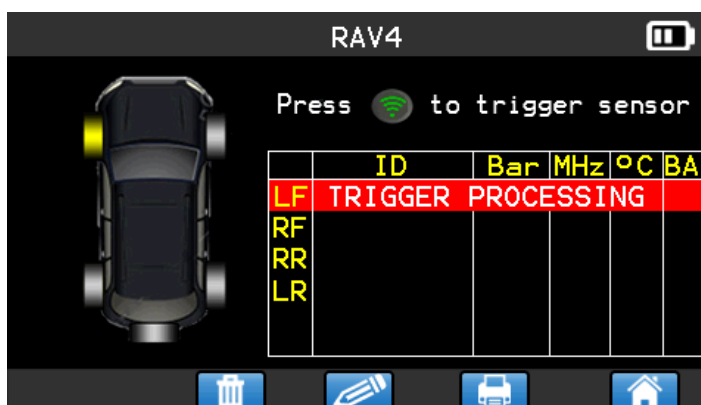

LF

**Pass**

The tool is triggering the sensor.



= Continue



= Previous and erase results

Trigger all wheels.



RF



RR



LR



**Pass**

**Pass**


**Pass**



= Continue



= Previous and erase results

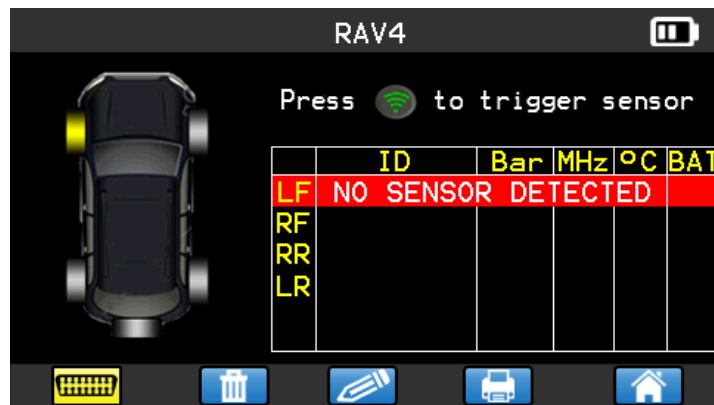

**Fail**

The tool has not detected a sensor. Try again.



= Continue



= Previous and erase results





= Next wheel.

### 1.3. REPROGRAM ECU THROUGH OBDII PORT

After all sensor IDs are read and displayed on the tool, connect **OBD** module to the tool. The **OBDII** icon appears on the header to confirm.

Plug **OBDII** module to the **OBDII** port on vehicle, and turn ignition on.



Select the OBD button .



= Continue



= Previous

The device prompts you to continue.



Select .



= Continue



= Previous



**Note:** Keep the engine **OFF** but keep ignition on.

Press the right arrow, to display the right hand drive vehicle




Back to the left hand drive vehicle by pressing the left arrow.



The transfer begins.  
The following messages appear briefly.

CONNECTED  
TRANSFER OK  
VERIFY OK  
SUCCESSFUL  
TRANSFER


The data transfer to the **ECU** is complete. **OBDII** module must be unplugged from the **DLC** connector.

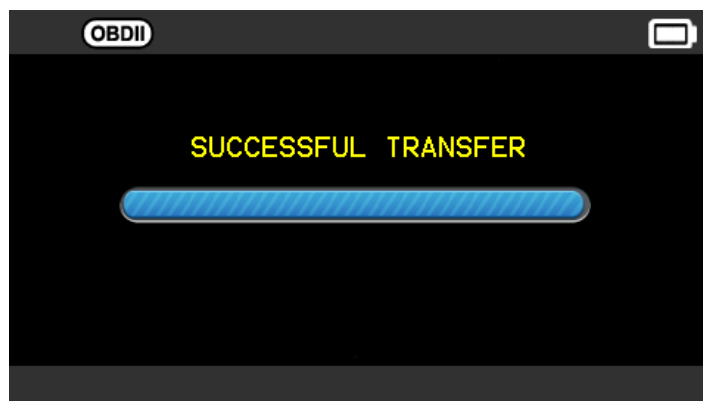

## 1.4. CUSTOMER PERSONALIZATION

This is to personalize the results of the vehicle with its information, Customer name, license plate number, VIN number and the mileage. This information will be written on the printed label.



Select the edition button .


The blank information screen appears, press



to edit the fields.




to select the character.

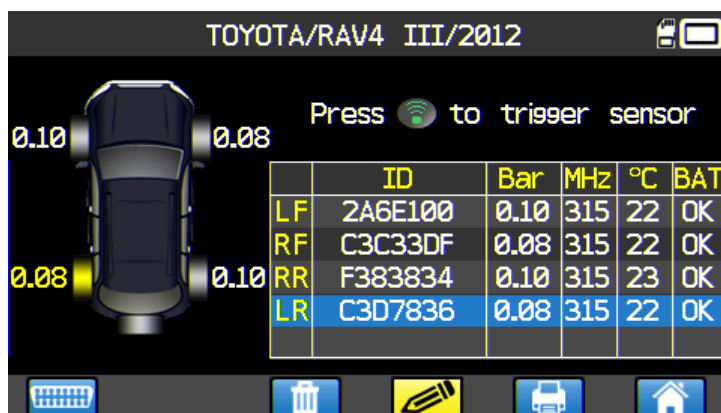

= Continue




= Previous

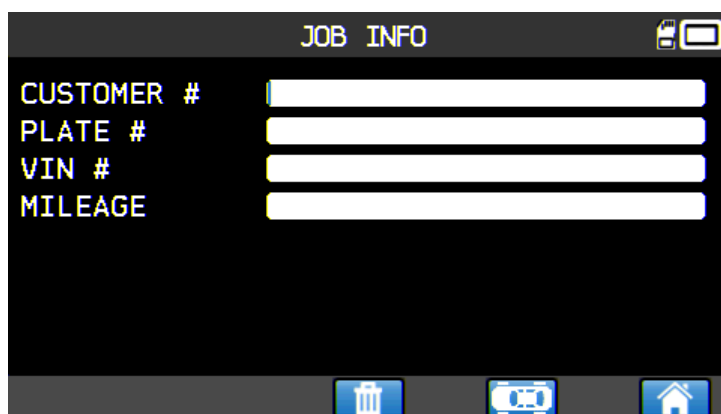

= Continue



= Previous

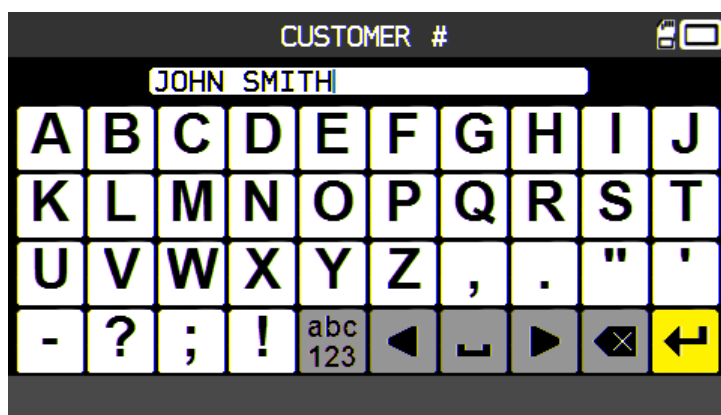

= to validate the character




= Previous



To validate the data in the field.




To erase the last character.



To change the keyboard to lowercase, numeric and uppercase.



To navigate in the field right and left.



Space.

Once the fields are entered, it seems like the following example (some field can stay blank):



to select the field or icon.

JOB INFO	
CUSTOMER #	JOHN SMITH
PLATE #	AVT-056
VIN #	1G1YY1382F5580678
MILEAGE	43769



= Continue




= Previous

This information will be useful, in searching menu with one of this data, to recover the previous job information, see paragraph "**Search menu**".

## 2. SERVICE TPMS





This is to service the sensors and more on the vehicle: Relearn procedure, RF detection, Part lookup, Keyfob test, Help.

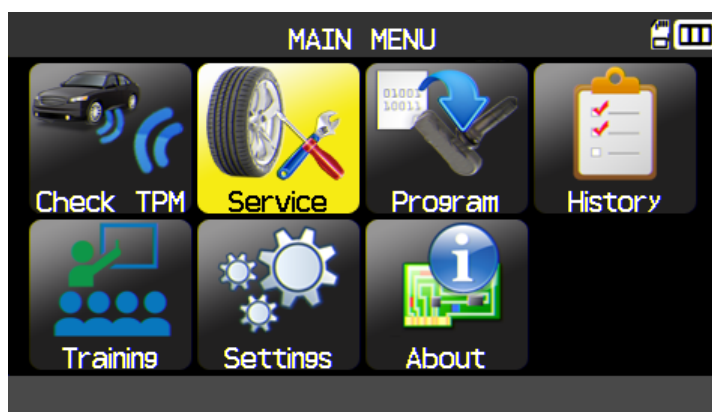


### 2.1. SELECT THE MMY SELECTION MODE

US version only or America zone selected. This is to choose the MMY selection mode manually or with the VIN barcode of the vehicle.

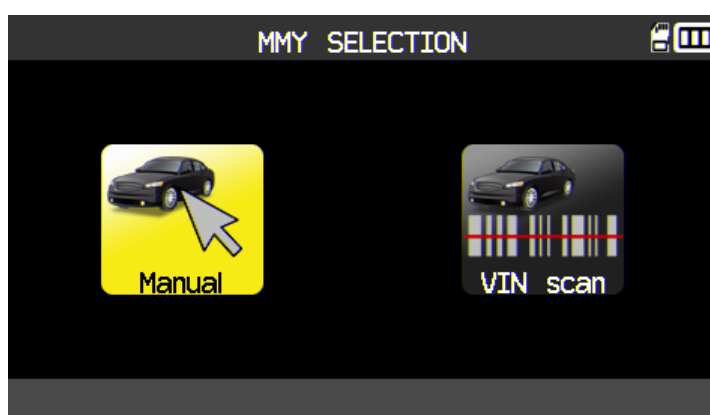

**2.2. SELECT CAR MANUFACTURER**


Scroll up and down  
to select a vehicle  
make.

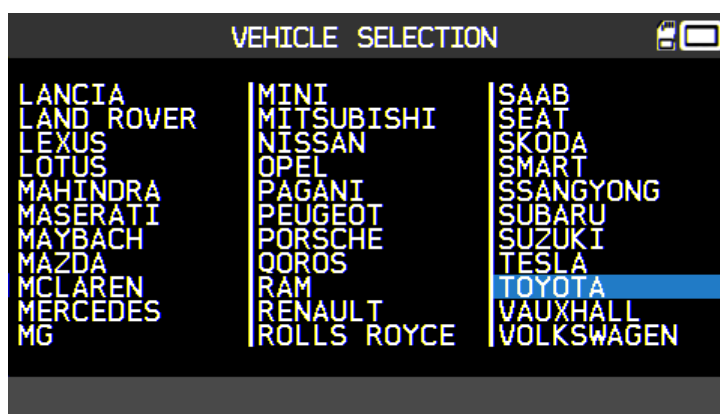


= Continue



= Previous

**2.3. SELECT VEHICLE MODEL**

Scroll up and down  
to select a vehicle  
model.

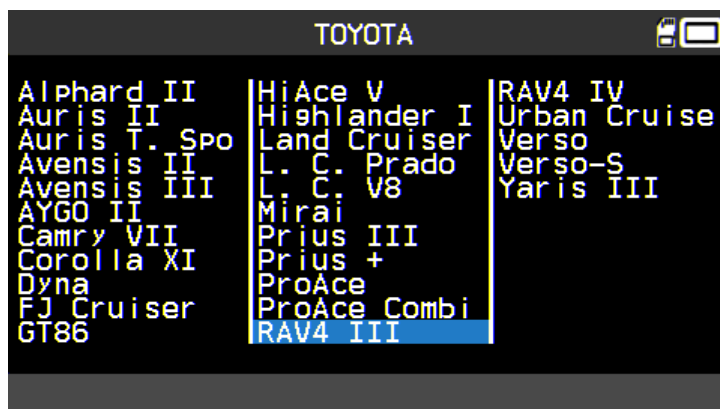


= Continue



= Previous

**2.4. SELECT YEAR**

Scroll up and down  
to select a year.

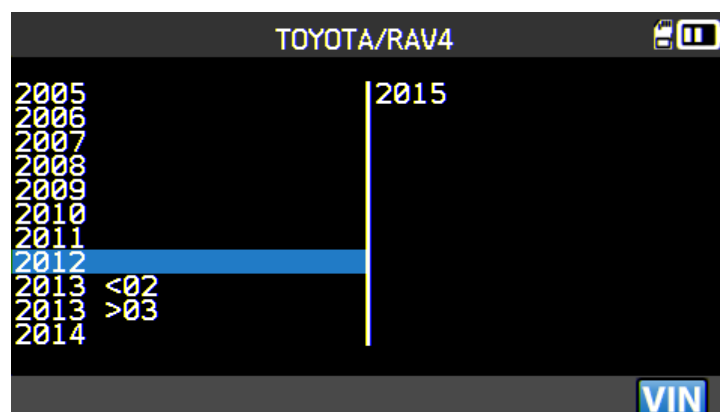

= Continue





= Previous

## 2.5. SELECT SERVICE

The following services are available:

- Relearn procedure,
- RF detection,
- Part lookup,
- Keyfob test,
- Help.

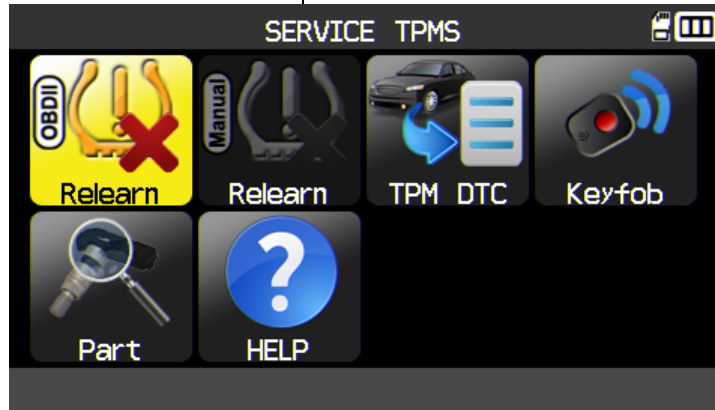



= Continue



= Previous

### 2.5.1. Service "Relearn OBDII"

This service explains the procedure to relearn the sensor on the vehicle.

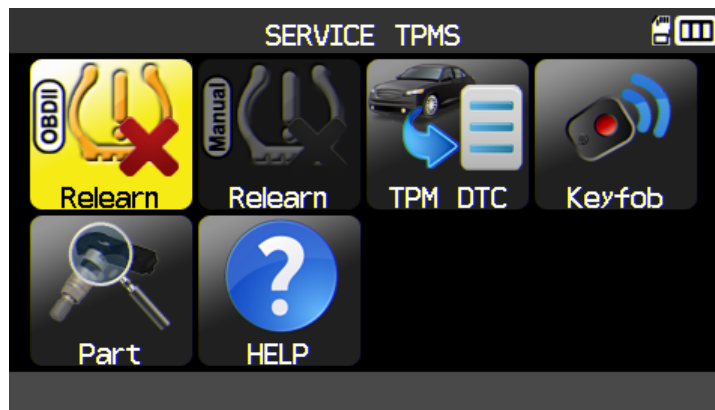


= Continue



= Previous

Follow instructions.

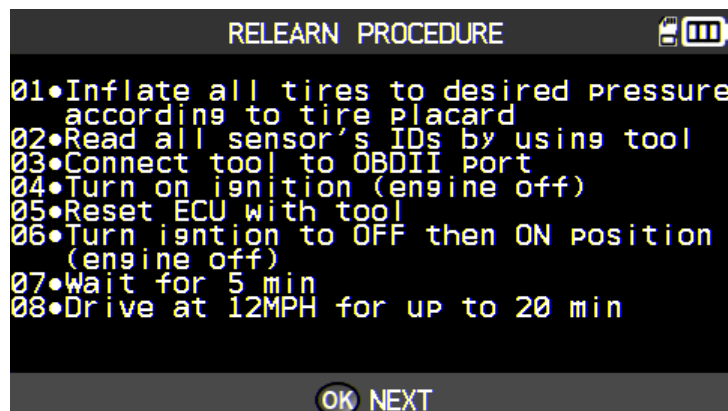


= Continue



= Previous




### 2.5.1. 1) Select the number of wheels

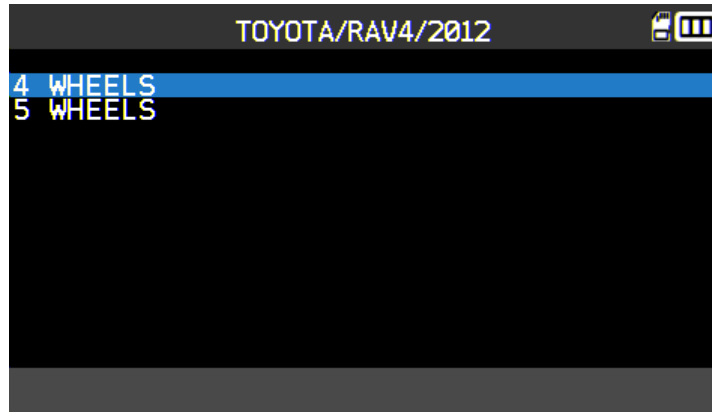


### 2.5.1. 2) Test sensors


The tool is ready to trigger sensors.

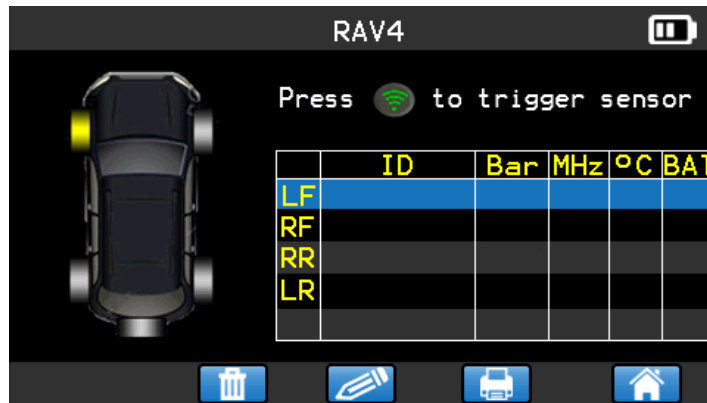


Proceed as "CHECK SENSOR".



Once all sensors are triggered, select the paste icon

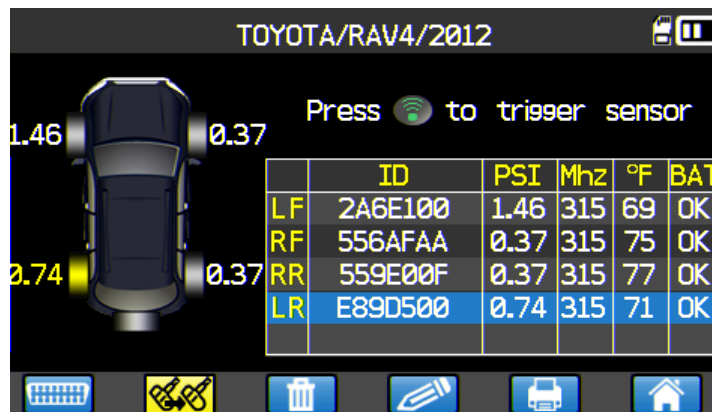

Select the sensors model to paste.

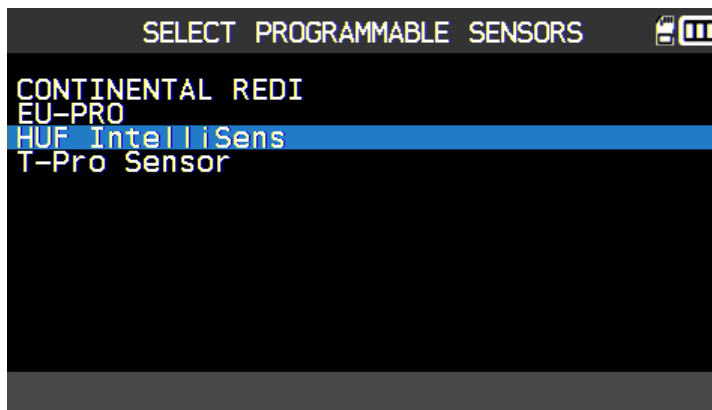



Select the wheels.

TOYOTA/RAV4/2012

Press to paste sensor

1.46			0.37
0.74			0.37

	ID	PSI	Mhz	°F	BAT
LF	2A6E100	1.46	315	69	OK
RF	556AFAA	0.37	315	75	OK
RR	559E00F	0.37	315	77	OK
LR	E89D500	0.74	315	71	OK



To paste the sensor.

Wait a few seconds.




Proceed as **"Copy sensor ID section"**.



### 2.5.2. Read TPMS DTC

**DTC** = Diagnostic Trouble codes.

This is for reading only the TPM codes. This menu is currently available for: Acura, Honda, Hyundai, Infiniti, Kia, Lexus, Mitsubishi, Nissan, Subaru and Toyota.




Note: Keep the engine OFF.

Press the right arrow, to display the right hand drive vehicle



Back to the left hand drive vehicle by pressing the left arrow.

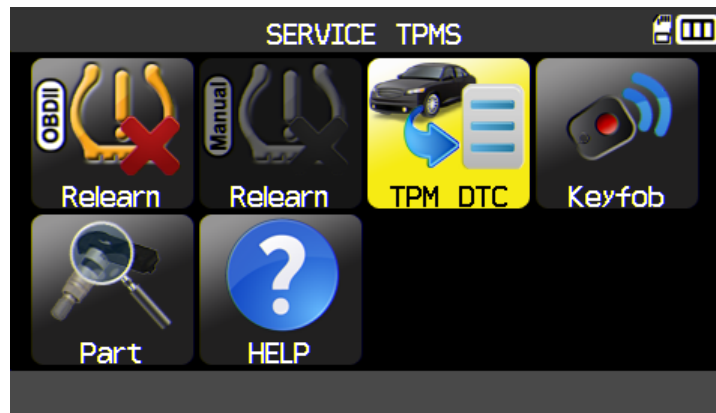

= Continue



= Previous



= Continue



= Previous



Plug **OBD2** module to the **OBD2** port on vehicle, and turn ignition on.


The DTC are displayed on the screen.




### 2.5.3. Keyfob test





This is to test the strength of the RF signal of the keyfob.

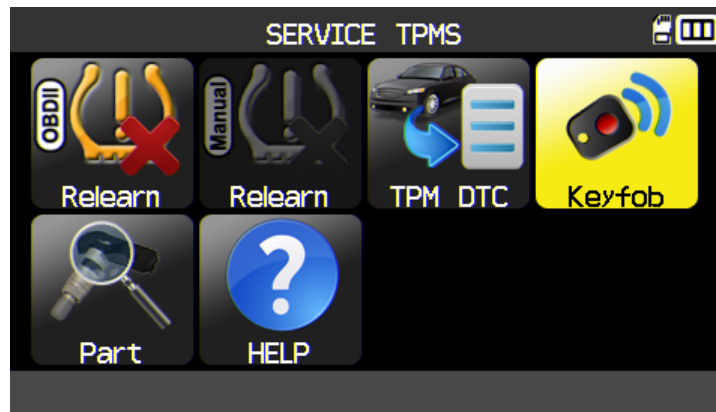

#### 2.5.3. 1) Select the frequency

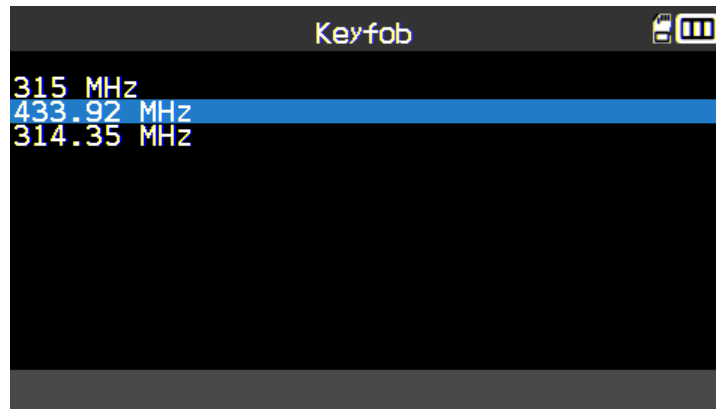


#### 2.5.3. 2) Read instructions

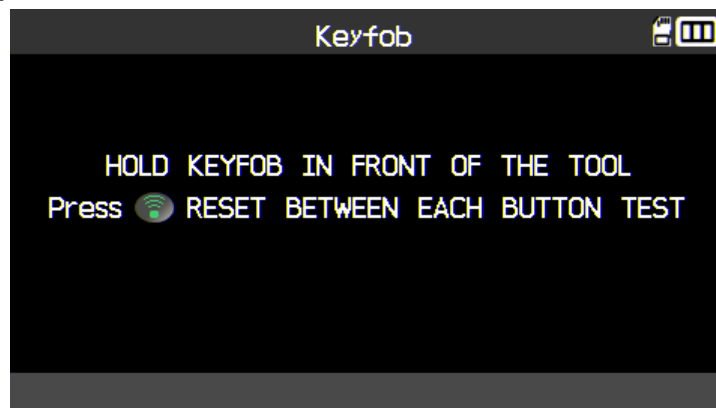

## 2.5.3. 3) Read instructions



Press keyfob buttons.

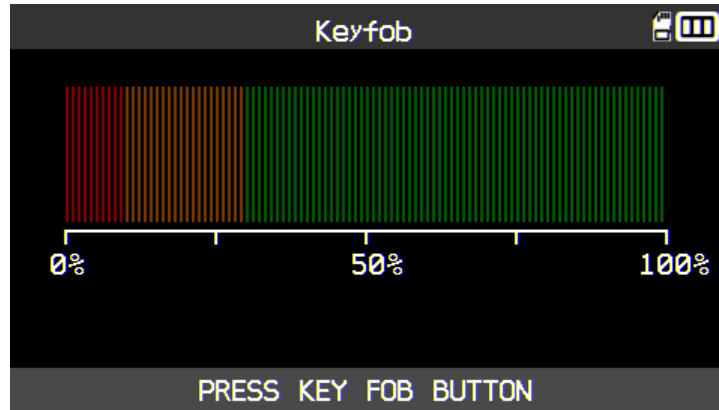


To reset the device and start a new test.

The device waits for RF signal.


## 2.5.3. 4) Test results

**PASS:** KEYFOB is working within its range to the device.

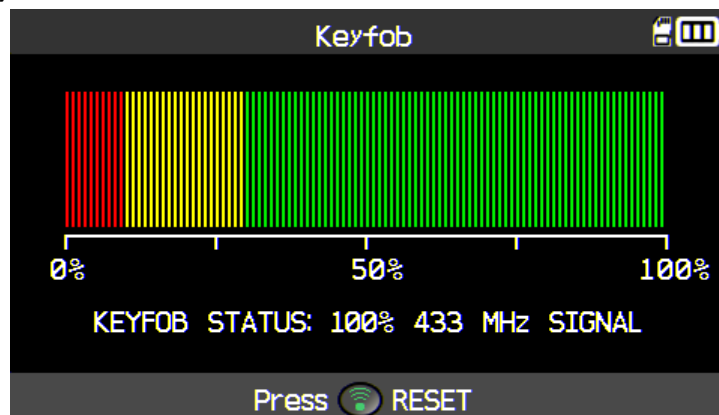

To reset the device and start a new test.


**FAIL:** Low signal strength, indicates low battery, replace battery (recommended).

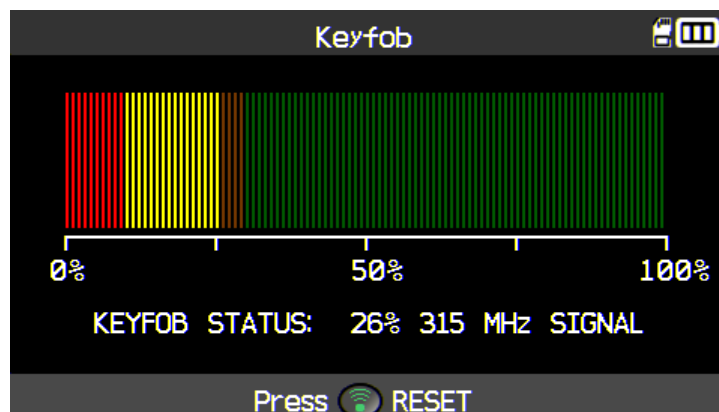

To reset the device and start a new test.

**2.6. SERVICE "PART"**

This is a spare parts data base for all the sensors available for all cars.

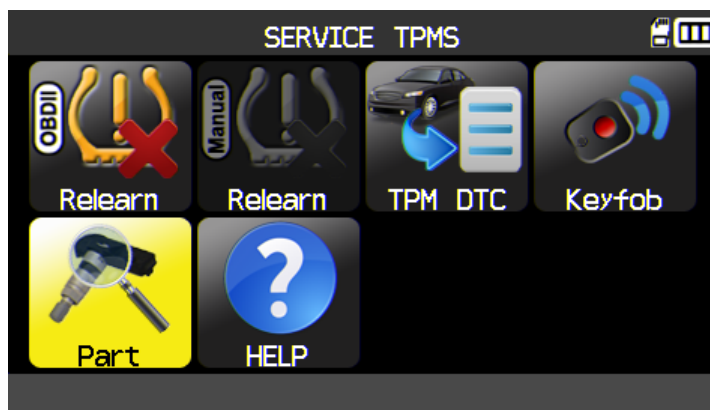

= Continue



= Previous



to scroll dealer's  
part number.

Sensor	Part number
OE	42607-06011
DILL	1204
DORMAN	974-033
MYERS	21049
NAPA	92-1187C
O'Reilly OE/S.	42607-06020
	17-20216AK
SEARS	95300



= Previous


Example of part suppliers:

OE  
DILL  
DORMAN  
MYERS  
NAPA  
O'Reilly OE/S  
SEARS

SMP  
John Dow Dynamic  
Continental  
REDI SENSOR  
Simple/Quick s  
TECH

## 2.7. SERVICE "HELP"


This feature is to assist the user to troubleshoot the TPMS issue.



Select the case of the issue.




To continue information texts.

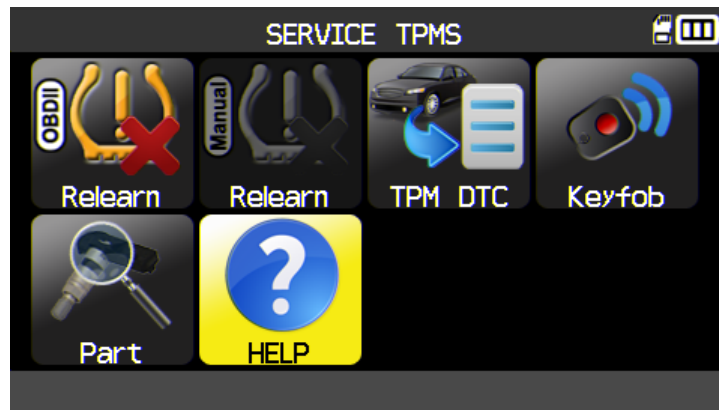

= Continue




= Previous

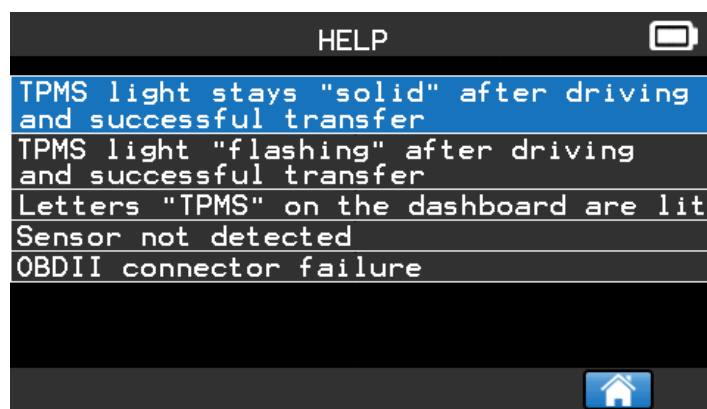

= Continue



= Previous

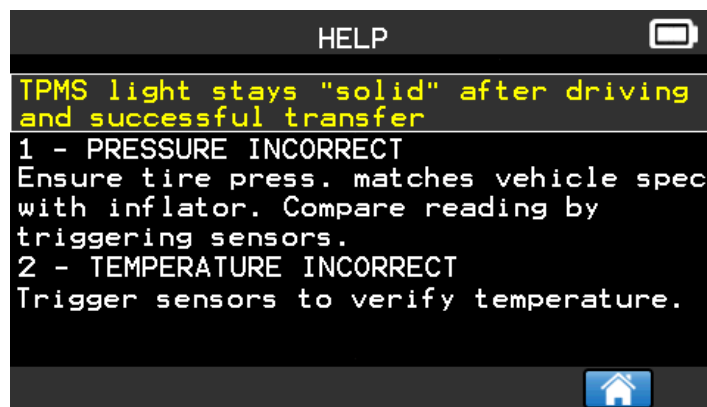

= Continue





= Previous

Follow instructions on the screen.

### 3. PROGRAM BLANK SENSOR

VDO TPMS PRO works with most known aftermarket universal programmable sensors with the options to create the new sensor IDs and /or to duplicate sensor ID(s) from original sensor(s).

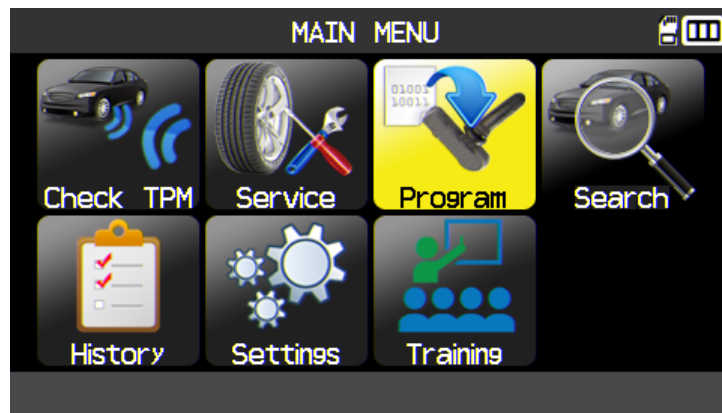



= Continue



= Previous

#### 3.1. SELECTION BY SENSOR MODEL

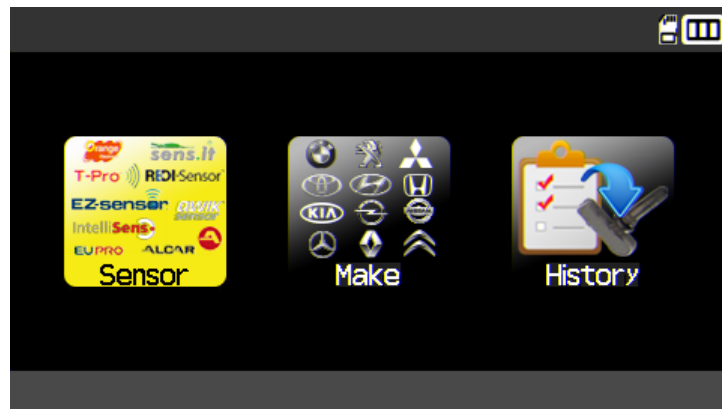


= Continue



= Previous



Scroll up and down  
to select a brand.

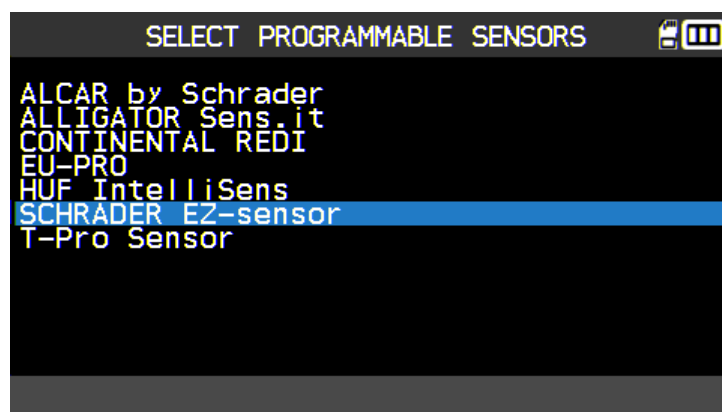


= Continue




= Previous

The sensor brands may vary depending on your settings.






Scroll up and down  
to select a vehicle  
make.




Scroll up and down  
to select a vehicle  
model.



Scroll up and down  
to select a year.


The models of  
sensors are  
displayed, use one  
of these

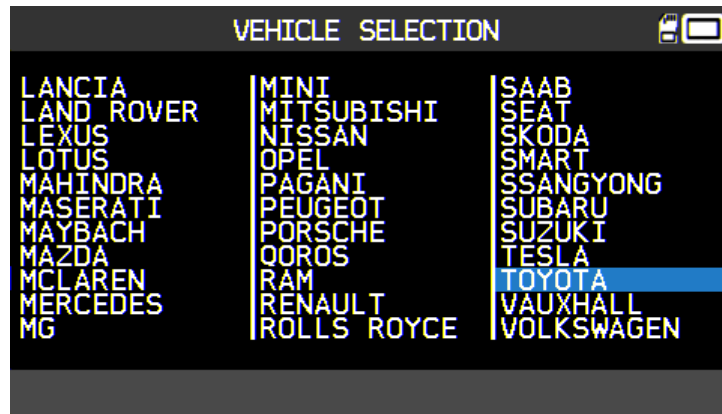

= Continue




= Previous

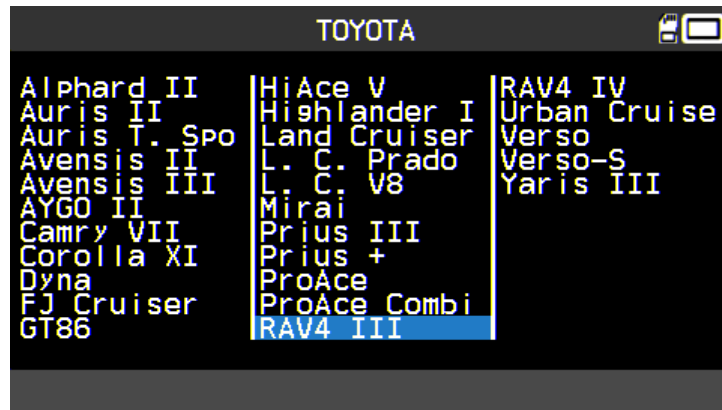

= Continue




= Previous

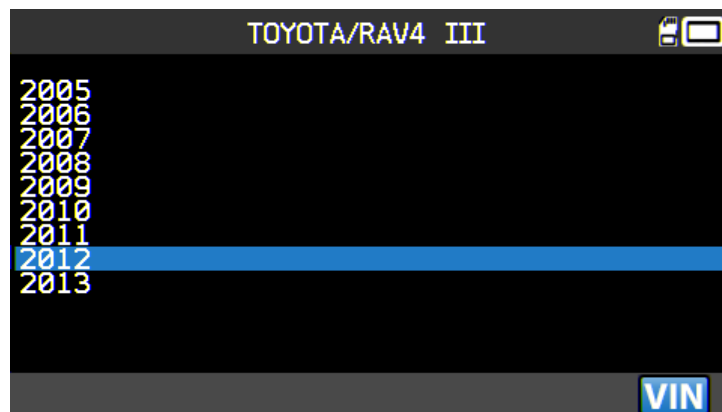

= Continue



= Previous


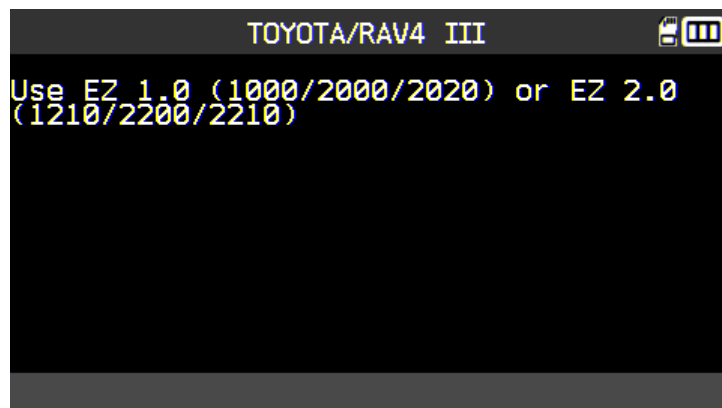


= Continue



= Previous

## 3.2. SELECTION BY MAKE

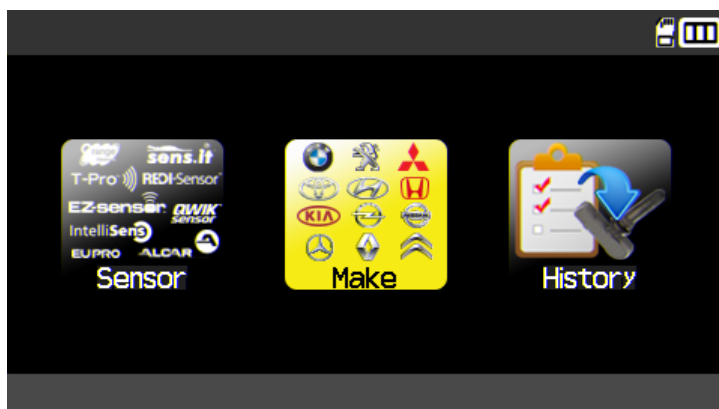


= Continue



= Previous



Scroll up and down  
to select a vehicle  
make.

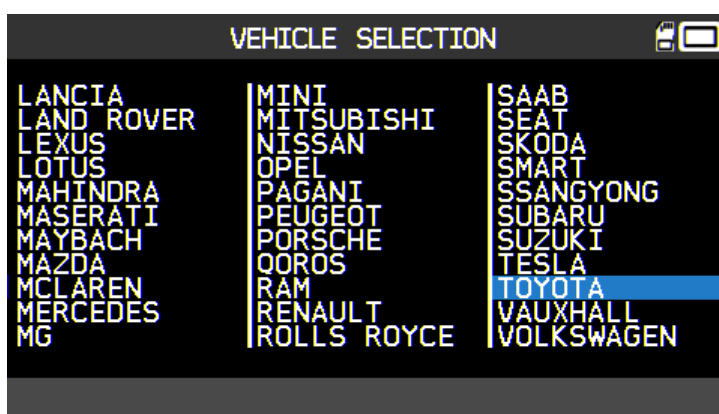


= Continue



= Previous



Scroll up and down  
to select a vehicle  
model.

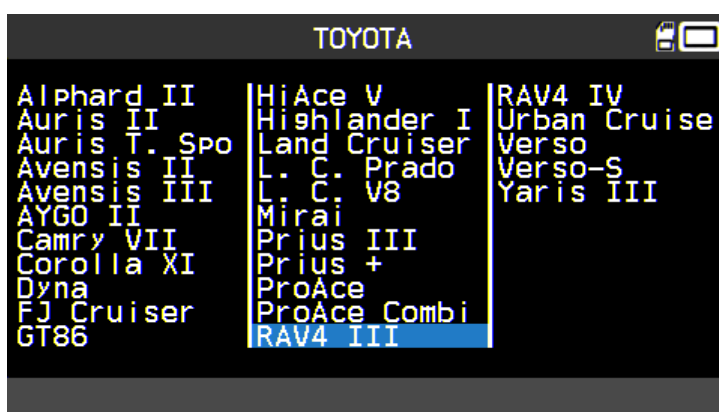


= Continue



= Previous



Scroll up and down  
to select a year.

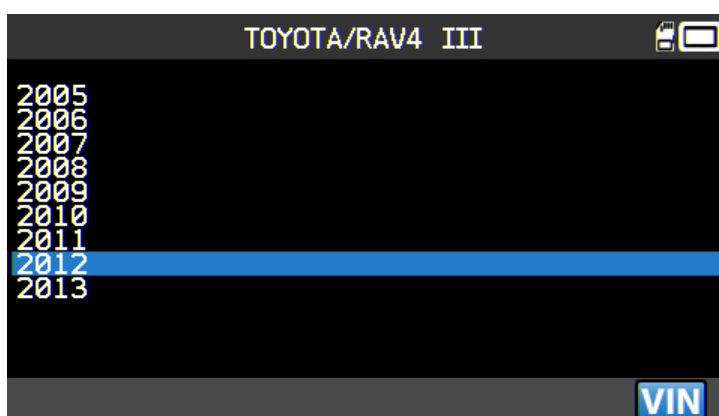

= Continue




= Previous





Scroll up and down to select a brand.

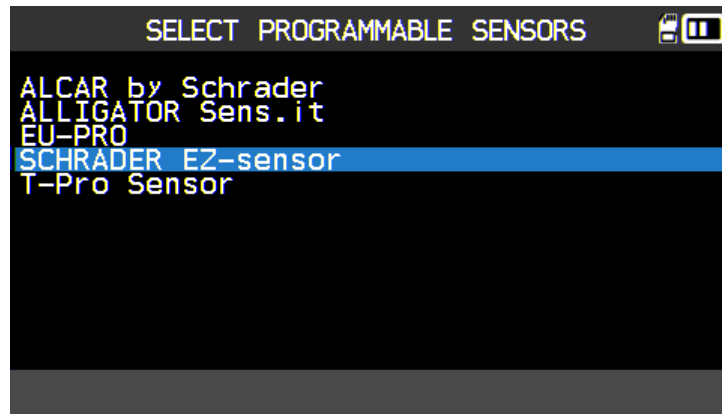


= Continue



= Previous

The sensor brands may vary depending on your settings.

The models of sensors are displayed, use one of these

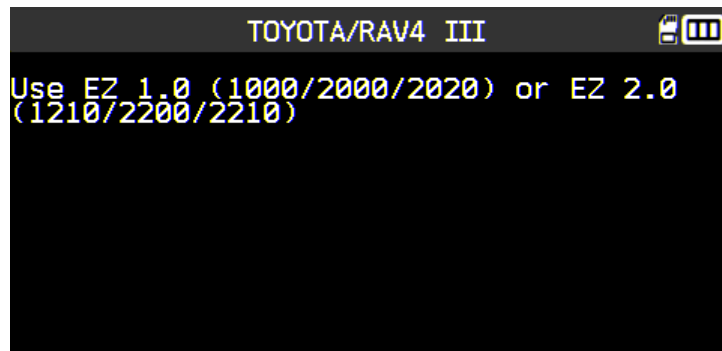


= Continue



= Previous

### 3.3. SELECTION BY HISTORY



= Continue



= Previous



Scroll up and down to select a vehicle.

RECENT		
Make/Model/Year	Date	Reset
TOYOTA/RAV4 III/2012	11/27/2015	---
TOYOTA/RAV4 III/2012	11/27/2015	---
TOYOTA/RAV4 III/2012	11/27/2015	---
TOYOTA/RAV4 III/2012	11/27/2015	---
TOYOTA/RAV4 IV/2013	11/27/2015	---
TOYOTA/RAV4 III/2012	11/27/2015	---
TOYOTA/RAV4 /2012	09/23/2015	---
TOYOTA/RAV4 /2012	09/22/2015	---




= Continue



= Previous

### 3.4. "COPY SENSOR ID" SECTION

This section is to recover a sensor ID if the "old" sensor can be cloned.



Scroll Right and left to select the **COPY** option.



= Continue



= Previous

Position the sensor in front of the tool antenna to check the sensor.




To trigger the sensor.

The tool trigger the sensor, wait a few seconds.



The sensor data are displayed.

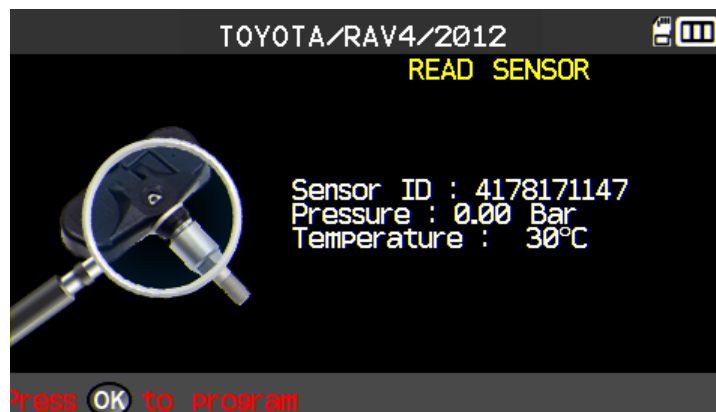

= Continue




= Previous

Position the sensor  
in front of the tool  
antenna to send the  
ID to the new  
sensor.




Wait a few seconds.

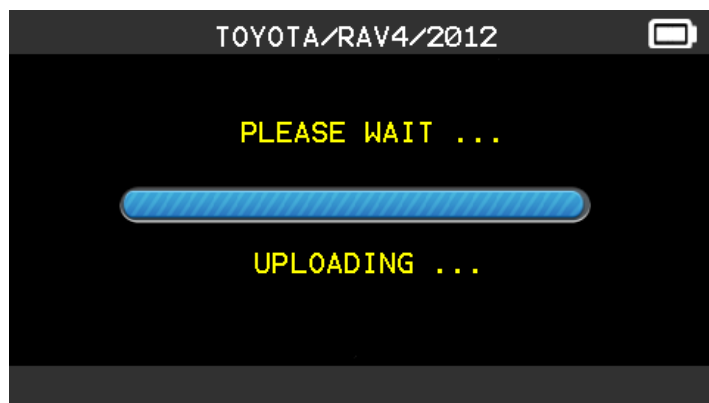

The tool verifies the  
ID uploaded.




The sensor is  
cloned.

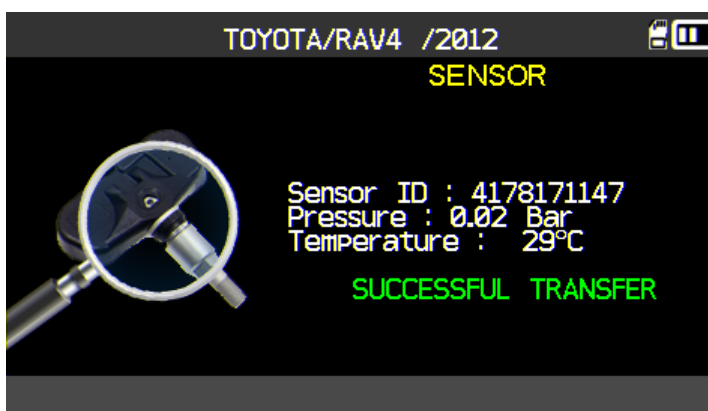

### 3.1. "CREATE SENSOR ID" SECTION

This section is to create a MMY specific sensor if the "old" sensor can't be cloned. The new sensor ID(s) are generated randomly by the tool, and may not be the same as the original one. Perform TPMS reset, see section 2, is required when replacing new sensors.



Scroll Right and left  
to select the  
**CREATE** option.



= Continue



= Previous

Position the sensor  
in front of the tool  
antenna to send ID  
to the new sensor.




= Continue



= Home


Wait a few seconds.

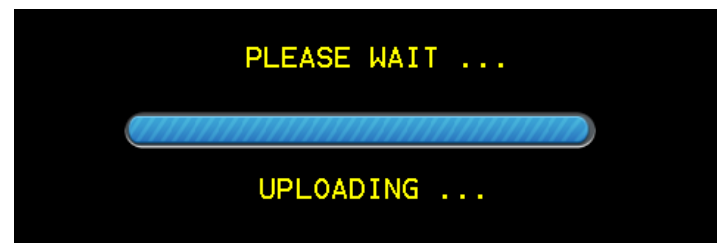

The tool verifies the  
ID uploaded.




The sensor is created.

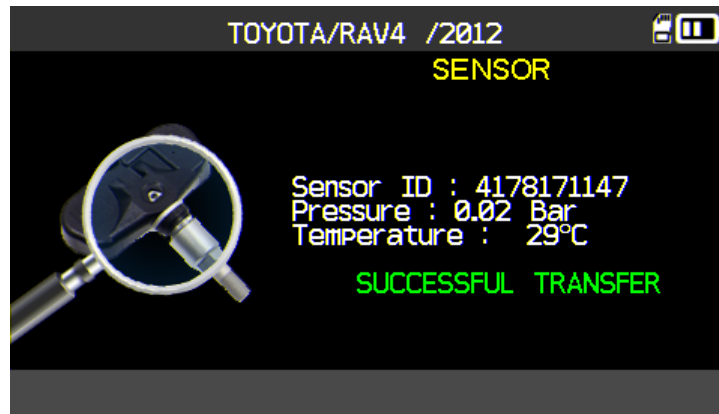


### 3.1. "COPY ALL SENSOR IDS"


To clone all sensor IDs from the "old" sensors.




Scroll Right and Left to select the **CREATE** option.

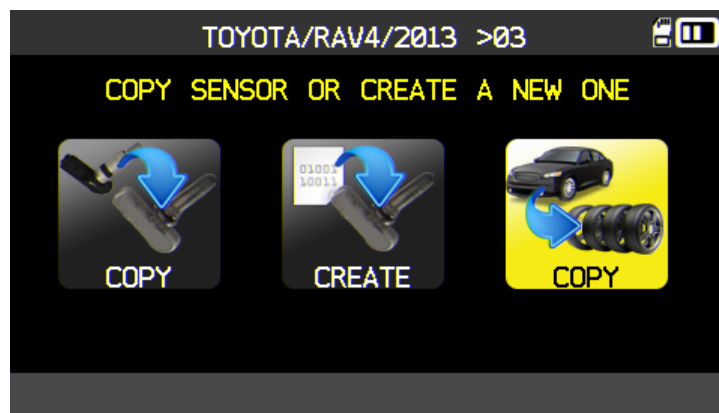

Proceed as "**CHECK SENSOR**" and trigger the 4 sensors.




Once all sensors are triggered, select the Clone Icon

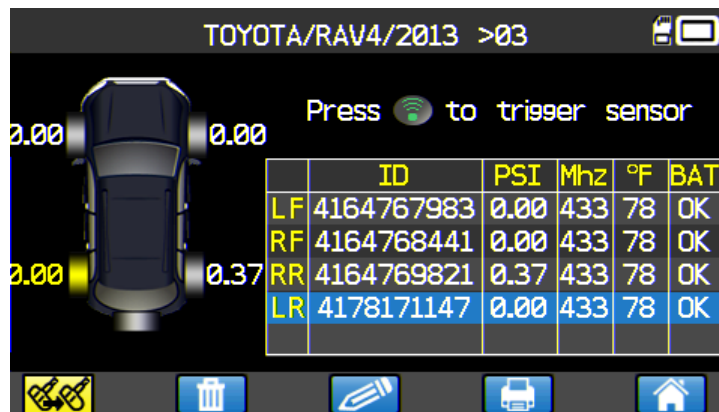




Select the wheel to clone.

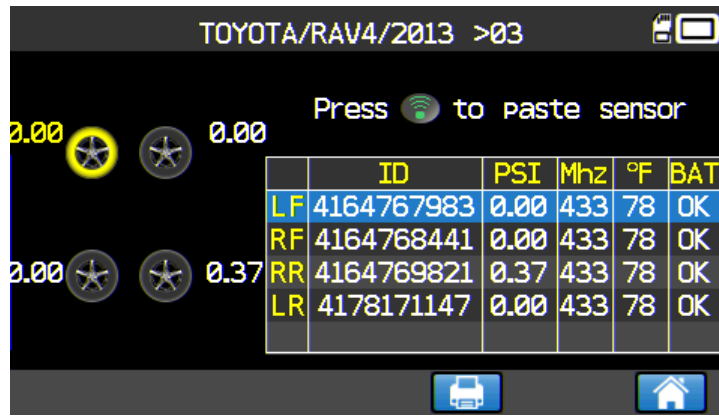

To clone the sensor.

Position the sensor in front of the tool antenna to send ID to the new sensor.

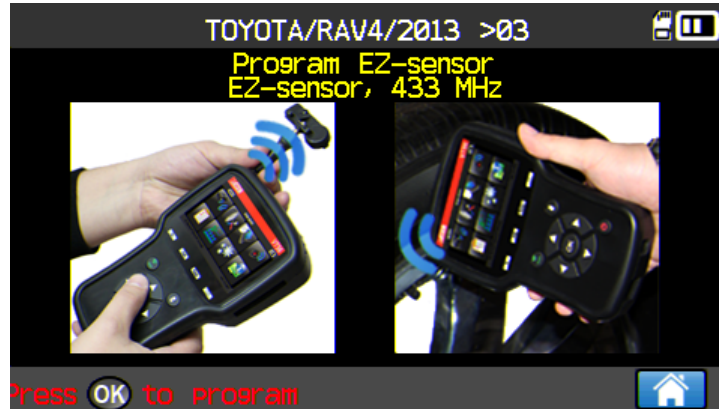


= Continue



= Home

Wait a few seconds.

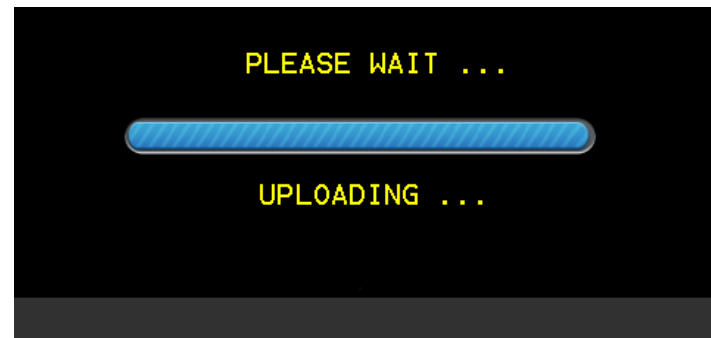


The tool verifies the ID uploaded.






The sensor is cloned.

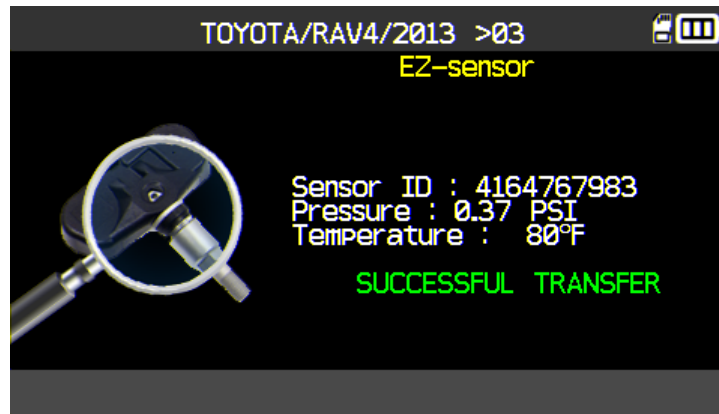

Select another wheel to clone.

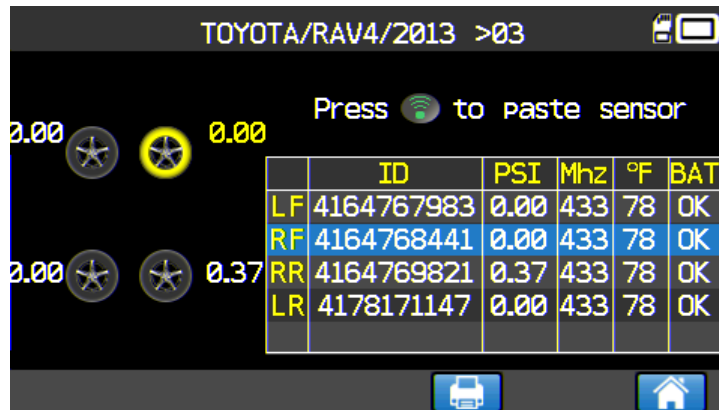

Proceed as show above for all the remains wheels.

### 3.2. REPROGRAM ISSUE

In case of ID transfer issue, the following message appears, start again.



## 4. SEARCH MENU

### 4.1. STANDARD KEYBOARD SEARCHING

This menu allows searching a vehicle already triggered in the device database.





The search is possible by:  
**CUSTOMER, PLATE, VIN or MAKE.**



A keyboard is displayed for characters entering, select  to validate.





  
= Continue

  
= Previous

  
= Continue

  
= Previous

  
= Continue

  
= Previous






To select  for data displaying.



To select the vehicle.



to select the action.




SEARCH

CUSTOMER #

PLATE #

VIN #

MAKE



= Continue



= Previous

SEARCH

Make/Model/Year	Date	Reset
TOYOTA/RAV4 III/2012	12/03/2015	---
TOYOTA/RAV4 III/2012	12/03/2015	---

     1/1



= Continue



= Previous

TOYOTA/RAV4 III/2012

Press  to trigger sensor

	ID	Bar	MHz	°C	BAT
LF	2A6E100	0.10	315	22	OK
RF	C3C33DF	0.08	315	22	OK
RR	F383834	0.10	315	23	OK
LR	C3D7836	0.08	315	22	OK





= Continue



= Previous

#### 4.1. AUTOMATED SEARCH FROM VIN

This is to searching a vehicle already triggered in the device database with the **VIN** bar code.


Select the **VIN** field.


In the **VIN** search menu, select the **VIN** button.


**OK**  
= Continue

**C**  
= Previous

**OK**  
= Continue


**C**  
= Previous

**OK**  
= Continue

**C**  
= Previous

The VIN bar code location is displayed.

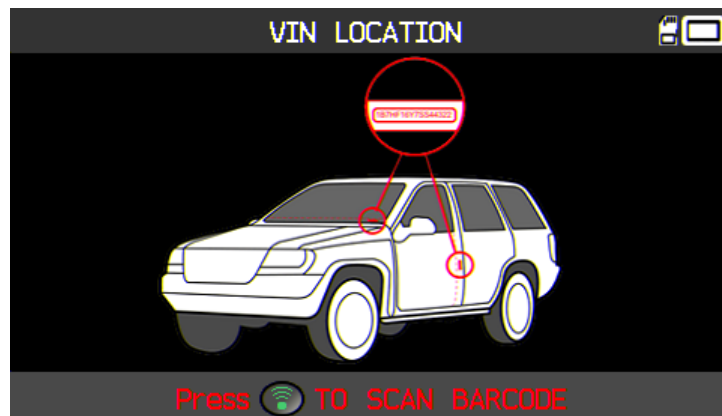

  
To scan the VIN's bar code

The VIN scanned is displayed in the field.

Select  for data displaying.

  
= Continue

  
= Previous

The corresponding vehicle is displayed.



Make/Model/Year	Date	Reset
TOYOTA/RAV4 III/2012	12/03/2015	---
TOYOTA/RAV4 III/2012	12/03/2015	---

  
= Continue

  
= Previous

## 5. HISTORY

This feature is to list the last device activity.




Scroll Right and left  
to select the  
**HISTORY** option.

**Recent** option




Select the make to  
display.

The screen of the  
selected vehicle with  
the last state of  
triggers appears. It's  
possible to continue  
to trigger the vehicle.

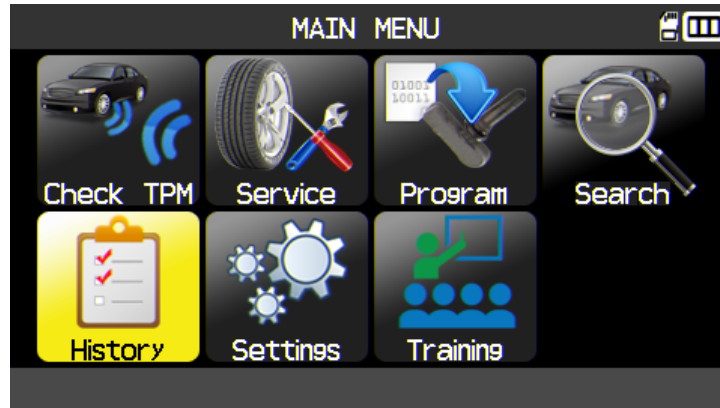

RECENT		
Make/Model/Year	Date	Reset
HONDA/Odysey/2012-2013	02/15/2000	---
HONDA/Odysey/2012-2013	02/15/2000	---
OPEL/Insigna/2014	02/14/2000	---
OPEL/Insigna/2014	02/14/2000	---
HONDA/Odysey/2012-2013	02/13/2000	---
CITROEN/DS5/2014	02/13/2000	---
BMW/Serie 1/2014...	02/13/2000	---






Scroll Right and left  
to select the  
**HISTORY** option.

**Statistics** option



To change the page.



Scroll Right and left  
to select the  
**HISTORY** option.



= Continue



= Previous

Maker	Triggers	Relearns
SMART	0	0
SUBARU	0	0
SUZUKI	0	0
TESLA	0	0
TOYOTA	4	0
VOLKSWAGEN	0	0
VOLVO	0	0



= Continue



= Previous



= Continue



= Previous

USAGE	
Serial number	
Number of power cycles	: 21
Number of triggers	: 20
Number of relearns	: 2
Number of softwares updates	: 0




= Previous

## 6. SETTINGS

### 6.1. ENTER SETTINGS MENU




Select the function or settings.

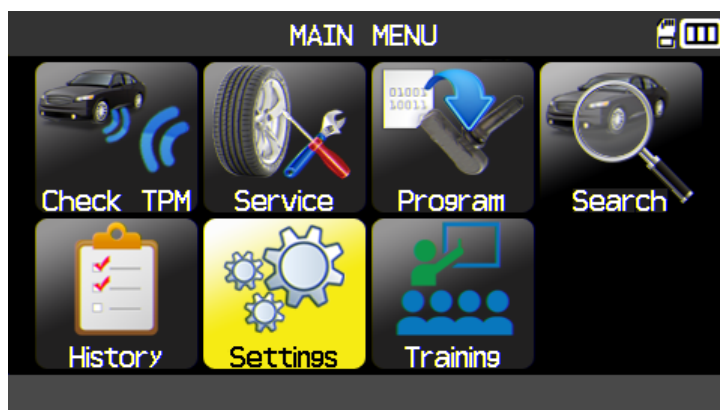

= Continue



= Previous

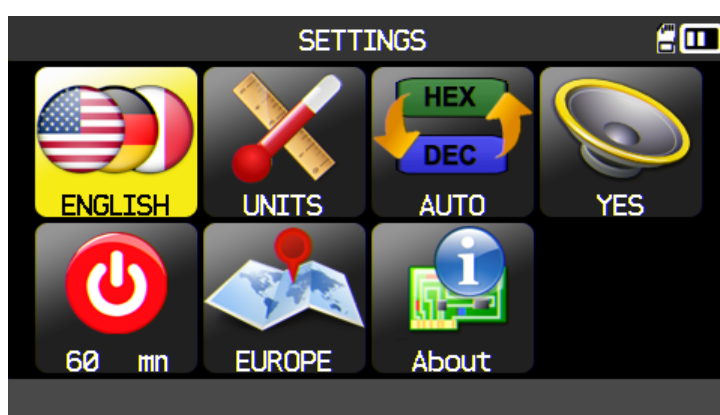

= Continue



= Previous

**Note:** in each icon is written the state of the setting.

	<b>LANGUAGE</b>	Select displayed language among Cestina, Dansk, Deutsch, Engelska, English, Español, Français, Italiano, Nederlands, Norsk, Polski, Portugues, Suomi.
	<b>UNITS</b>	Change the air pressure and temperature display (kPa, Bar or PSI with F° or C°).
	<b>FORMAT</b>	Change the format of sensor ID display.
	<b>BUZZER</b>	Turn buzzer to ON or OFF (YES or NO).
	<b>AUTO OFF</b>	Time to turn off the device automatically after not being operated.
	<b>ZONE</b>	To select the area of work, <b>AMERICA</b> , <b>EUROPE</b> or <b>KOREA</b> . Be careful, when you change the zone, a WebVT download or SD card is required to get the zone data.



### 6.1.1. Change language settings


**LANGUAGE:** select displayed language among Cestina, Dansk, Deutsch, Engelska, English, Español, Français, Italiano, Nederlands, Norsk, Polski, Portugues, Suomi.



Select the function or settings.



Scroll up and down to select.

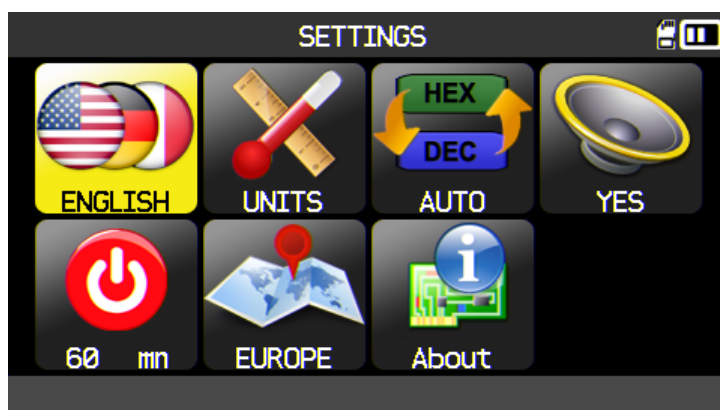

= Continue



= Previous




= Confirm




= Previous

### 6.1.2. Change Units settings

**UNITS:** change the air pressure and temperature display (kPa, Bar or PSI with F° or C°).



Select the function or settings.

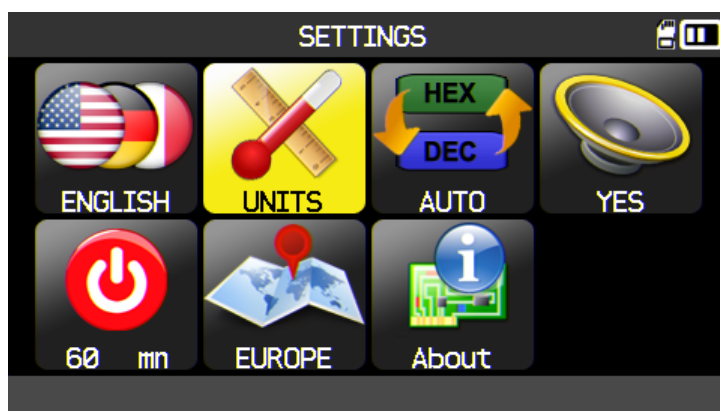


= Continue



= Previous



Scroll up and down  
to select the **Units**.

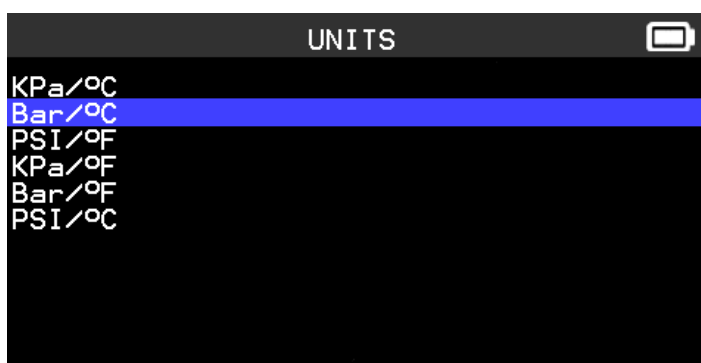

= Confirm




= Previous

### 6.1.3. Change Format settings

**FORMAT:** change the format of sensor ID display.



Select the function  
or settings.

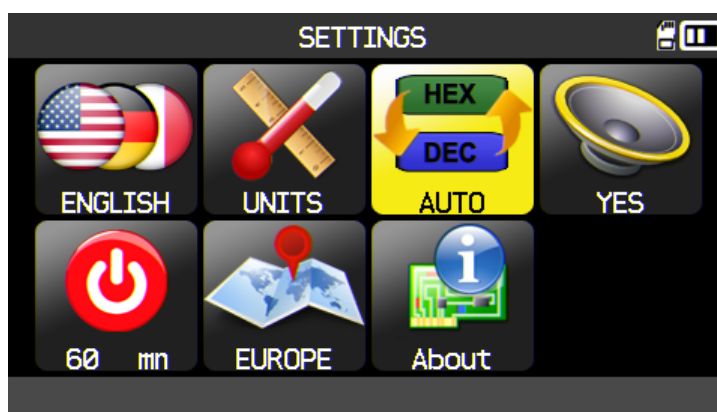


= Confirm



= Previous



Scroll up and down  
to select a format.

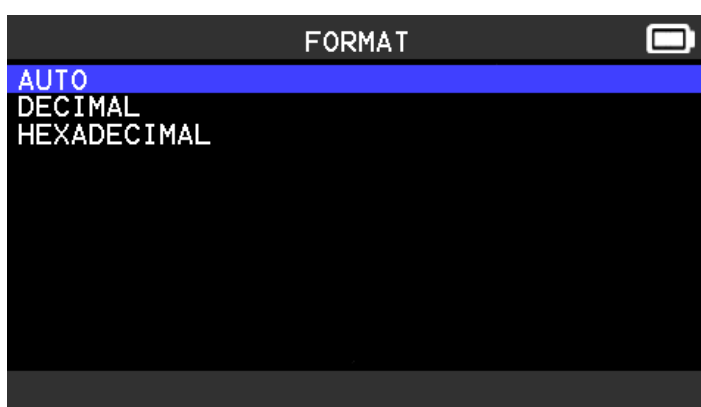

= Confirm



= Previous

**AUTO:** display sensor ID format in the way sensor is transmitting.

**DECIMAL:** force to display sensor ID in decimal (0 to 9).

**HEXADECIMAL:** force to display sensor ID in hexadecimal (0 to F).

### 6.1.4. Change Buzzer settings

**BUZZER:** turn buzzer to ON or OFF. (YES or NO).


When buzzer on is set to **YES**, a beep is triggered when the sensor ID is detected.



Select the function or settings.




Scroll up and down to select **Yes** or **No**.

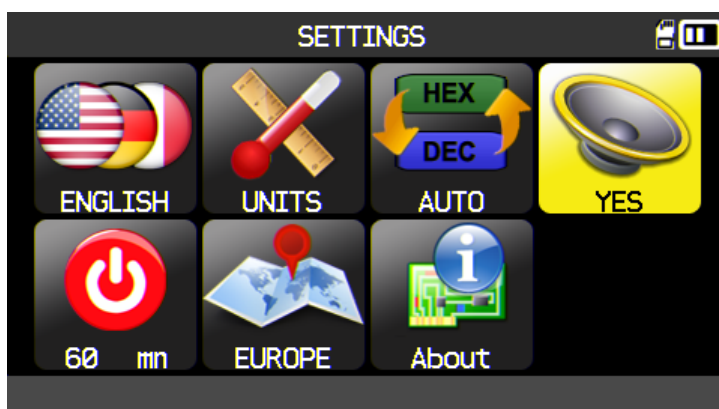

= Confirm



= Previous

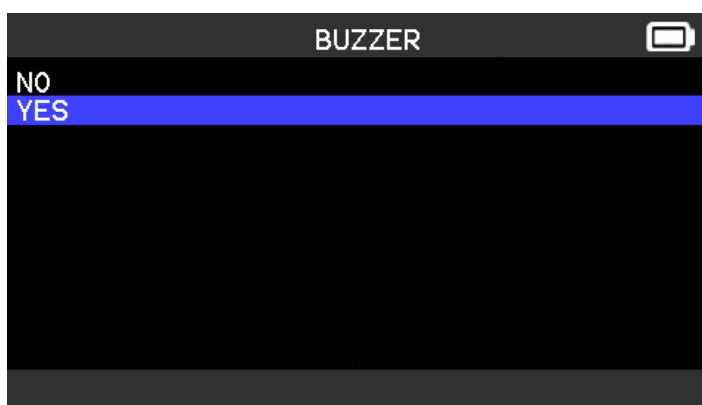

= Confirm




= Previous

### 6.1.5. Change Auto Off settings

**AUTO OFF:** time to turn off the device automatically after not being operated.



Select the function or settings.

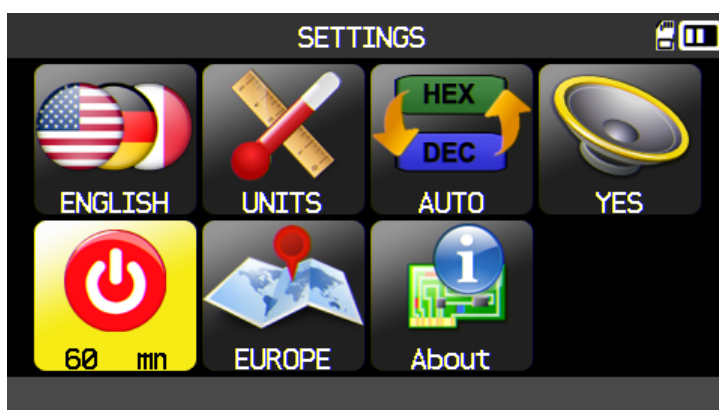


= Confirm



= Previous



Scroll up (+) and down (-) to change time.

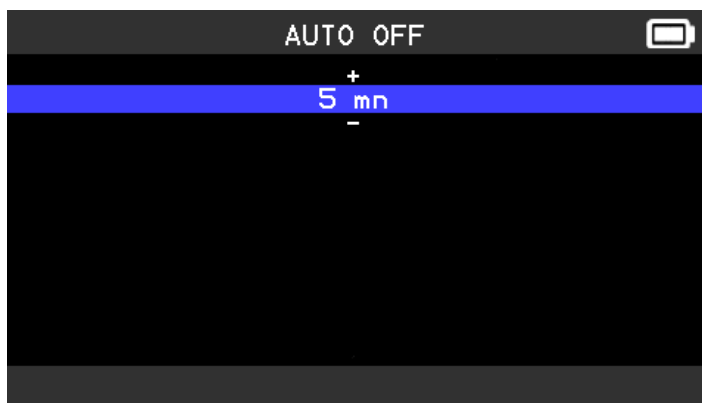

Change by **60 min** (maximum) to **DISABLED** (never).



= Confirm




= Previous

### 6.1.6. Change Zone settings



Select the function or settings.

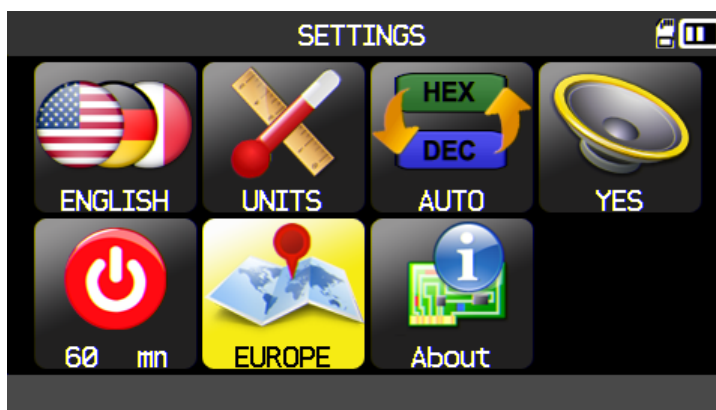

= Confirm



= Previous



Scroll up and down to select a new zone.




= Confirm




= Previous

The tool will load the new database for the selected zone.

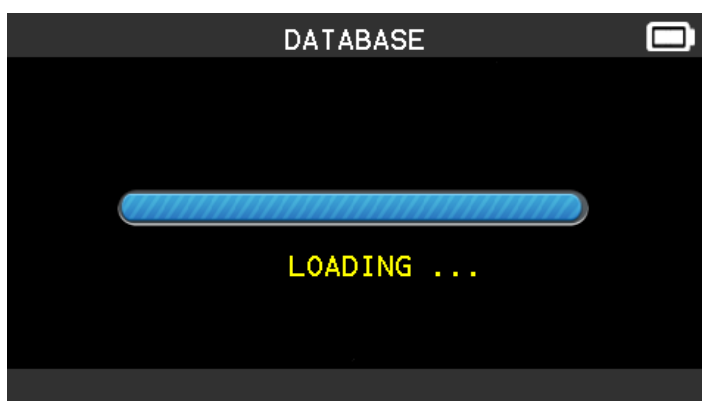

6.1.7. About



= Continue



= Previous




= Previous




## 7. TRAINING

This feature is to show the some processes as various relearns, update tool, etc.

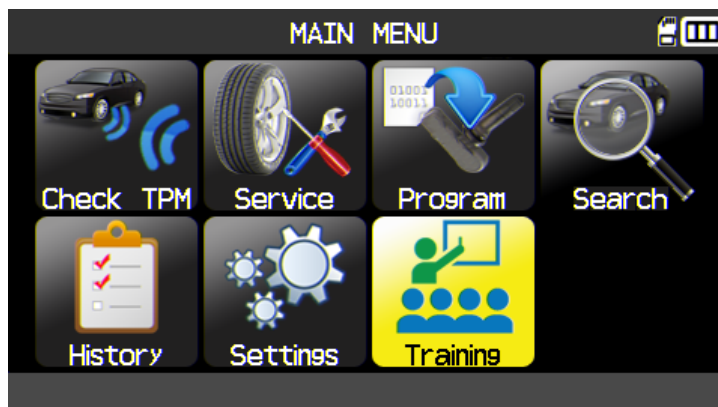

= Continue

Example of training:

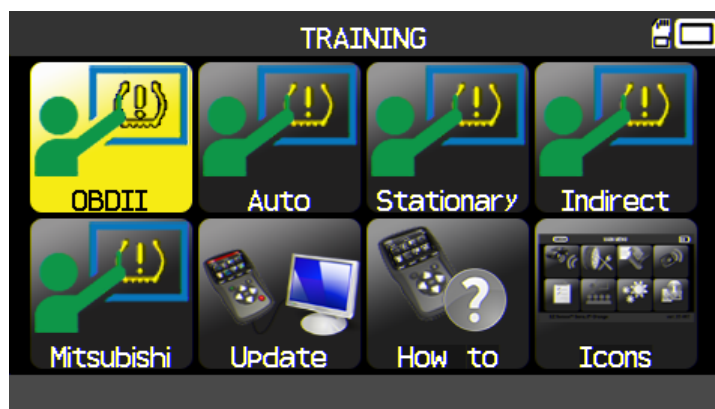

= Continue



= Previous



To change the page.



= Continue



= Previous




## MISCELLANEOUS

### 1. CHARGE

#### Low Battery Indication

Your **VDO TPMS PRO TOOL** incorporates a low battery detection circuit. Battery life is an average of 800 sensor tests per battery charge (approximately 160 to 200 vehicles) this may change following the sensor model.

Battery indicator status:

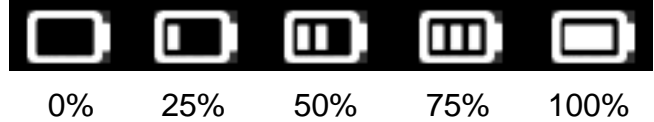

When 0% is flashing the tool will turn off after 10 seconds.



The battery is charging.



The battery has an issue, please contact after sales service.

**DO NOT** use the tool with low battery status because the transmission and emission may not be reliable.

When charging, the battery light is red and becomes green when the battery is fully charged.



Two means for charging the tool:

- Directly plug the supply jack to the tool and plug the supply in an appropriate outlet.
- Plug the jack to the docking station and install the tool in. The docking and in all cases, the LED "**CHARGE**" light will turn on (red).

#### Battery replacement



It's recommended to return the tool to the factory for battery replacement.


## 2. PRINT SENSOR DETAILS


**Note:** This feature is only available after the user has triggered the sensors in the vehicle, and the tool has not been turned off.

1) Put the tool into its docking station; check that the all sensors are triggered.

2) Plug the charger (or check) to the docking station; this is to supply the printer.

3) Power on the printer, press the  button until the green light is flashing .


4) The printer will be ready when the battery light is on .


The  button is for feed the paper.


**Note:** the link between the tool and the printer is infrared.

```

TOYOTA
RAV4
2012
---- LEFT FRONT ----
Sensor ID : E89D500
Pressure : 0.03 Bar
Temperature : 23 C
Battery state: OK
---- RIGHT FRONT ----
Sensor ID : 2A6E100
Pressure : 0.08 Bar
Temperature : 23 C
Battery state: OK
---- RIGHT REAR ----
Sensor ID : 559E00F
Pressure : 0.03 Bar
Temperature : 26 C
Battery state: OK
---- LEFT REAR ----
Sensor ID : 559FA29
Pressure : 0.03 Bar
Temperature : 25 C
Battery state: OK
    
```



5) Select with the arrows the  icon.

6) Printing the results by pressing OK .



= Print



= Previous

### 3. TROUBLESHOOTING

If the **VDO TPMS PRO TOOL** is unable to trigger one or more of the sensors, using either electronic or magnetic activation, please use the following troubleshooting guide:


- 1) The vehicle does not have a sensor even though a metal valve stem is present. Be aware of Schrader rubber style snap-in stems used on TPMS systems.
- 2) The sensor, module or ECU itself may be damaged or defective.
- 3) The sensor may be the type that periodically triggers on its own and is not designed to respond to a triggering frequency.
- 4) Your **VDO TPMS PRO TOOL** may require a software upgrade.
- 5) Check “**Auto Off**” time settings for screen display.
- 6) Your **VDO TPMS PRO TOOL** is damaged or defective.

### 4. TOOL UPDATE

#### Upgrading Your VDO TPMS PRO TOOL

As a new protocol becomes available, it will become necessary to upgrade your tool. Please follow the steps below:

**IMPORTANT:** Temporarily turn off all of the anti-virus and spam blocking software on your computer. This is necessary to ensure a successful upgrade.

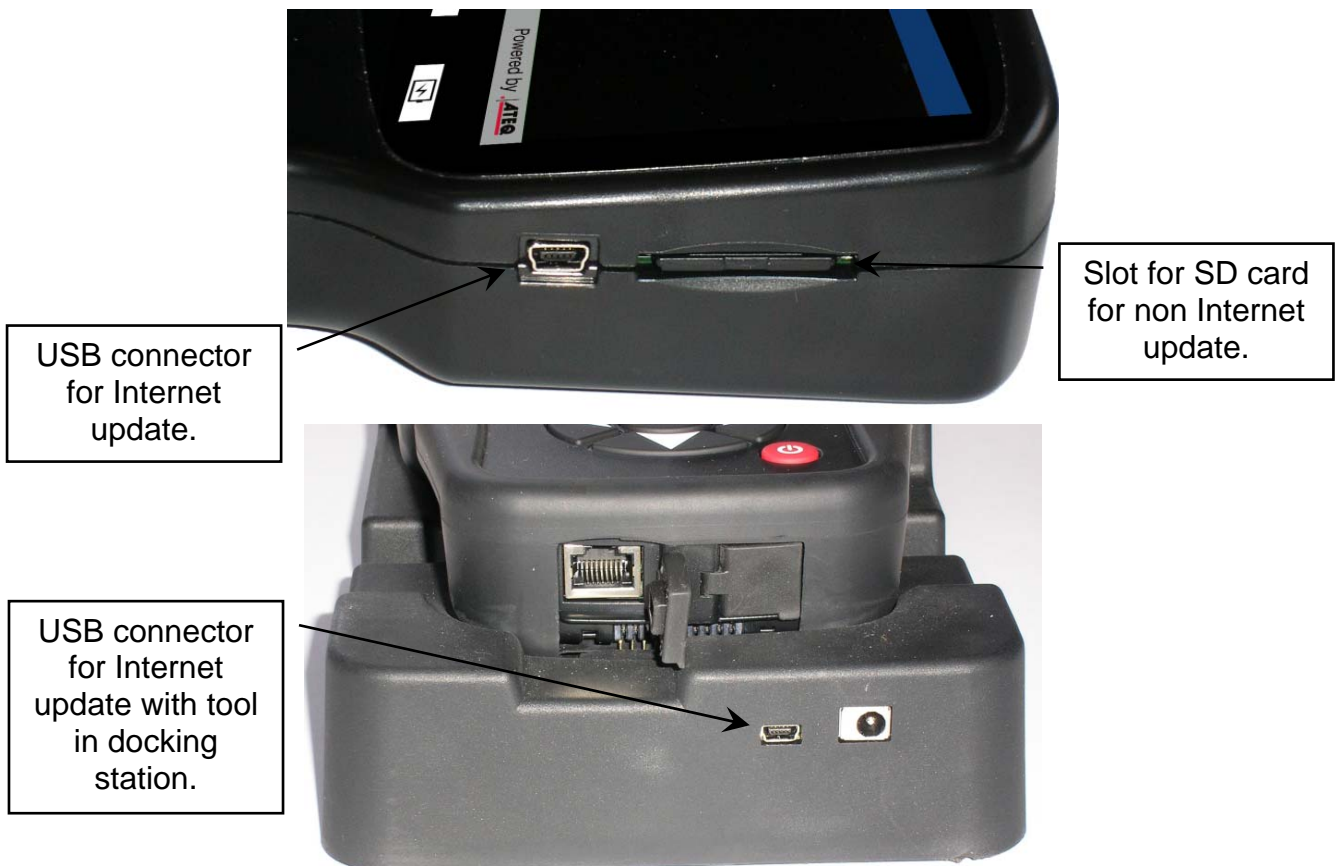

#### 4.1. INSTALL WEBVT PC SUITE

- 1) **Connect the VDO TPMS PRO tool to the USB port and power the tool ON.**
- 2) Insert the CD supplied with your tool, into the PC drive and click on the **WebVT** icon to start the program.
- 3) A screen will appear that says “**Welcome to the Install Shield Wizard for WebVT.**” Click “**Next >**”.
- 4) A window will appear to choose destination location, click “**Next >**”
- 5) Follow instructions until the window with the “**Finish**” button appears.
- 6) Click “**Finish**” when the **WebVT** installation is complete.

**Note:** To order annual update software part number, please see your dealer for availability and pricing.

#### 4.2. USB INTERNET OPTION UPDATING

Before updating, ensure that the battery charge is full.


- 1) Connect the **USB** cable from the **VDO TPMS PRO TOOL** to the **PC**, turn the device on.
- 2) Start **WebVT** software.
- 3) A screen will appear indicating “**Update Device**”.
- 4) You can also print “**Valve IDs**” from here as well.
- 5) Press “**Yes**” to update to the latest software version. Update will take several minutes to complete and the status bar will indicate the percentage of update completed.

#### **Warning!**

**Do not disconnect the VDO TPMS PRO TOOL from the PC or turn off your computer during the update process. This may result in serious damage to the tool.**

#### 4.3. SD CARD OPTION (NON INTERNET) UPDATING

Before updating, ensure that the battery charge is full.

- 1) Place the **SD card** into slot, pins facing upwards.
- 2) Turn the **VDO TPMS PRO TOOL** on and go to Main Menu.
- 3) Scroll down to **VDO TPMS PRO TOOL** Update and press enter.
- 4) Scroll down to **YES** and press enter.
- 5) You will now see File Selection, press the  key.
- 6) The tool will now update its software version.
- 7) When installation is complete, the tool will automatically turn off. **Remove the SD card.**
- 8) Turn the **VDO TPMS PRO TOOL** on. The latest software version will be displayed.

#### **Warning!**

**Do not turn off the VDO TPMS PRO TOOL or extract the SD card during the update process. This may result in serious damage to the tool.**

## 5. FACTORY RESET FOR PROGRAMMABLE SENSOR CHANGE


Following the programmable sensors, it need to update the database or reset the device to factory settings.

To realize this operation, use the **VDO WebVT** software.

- 1) Start the **VDO WebVT** software,
- 2) Connect the **VDO TPMS Pro** device to the **USB** port of your PC with **USB** cable supplied.
- 3) Turn on the **VDO TPMS Pro** device.
- 4) Click on the "**Settings**" button.




- 5) The opposite window appears:
- 6) Click on the "**Factory Reset**" button to reset to the factory settings the device. Then in the **VDO TPMS Pro** menus, select the "**Program**" menu and select the sensors family to program.

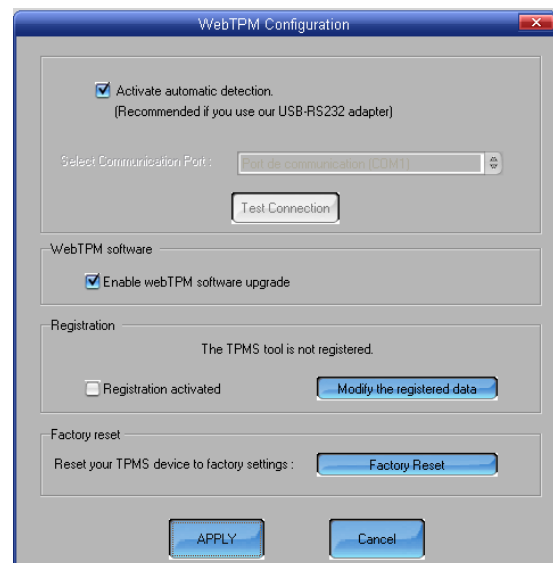

- 7) The sensor family choice is done in the opposite menu:
- 8) The selected family is displayed as below:

EZ-SENSOR	SENS.IT
SENS.IT	INTELLISENS
INTELLISENS	REDI
REDI	T-Pro

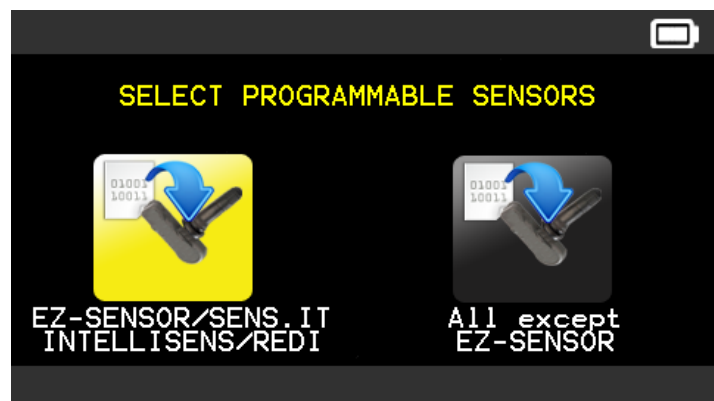



## 6. SAFETY BATTERY AND CHARGE INFORMATION

**You must read and understand these safety instructions and warnings before using or charging your lithium polymer batteries.**

### Operating environment

Remember to follow any special current regulations any area, and always switch off your device when its use is prohibited or when it may cause interference or danger.

Use the device only in its normal operating positions.

Your device and its enhancements may contain small part. Keep them out of the reach of small children.

### About Charging

Use only the charger supplied with your device. Use of another type of charger will result in malfunction and/or danger.

When the red LED turns off, the charge is complete.

### About the Charger

Do not use the charger in a high moisture environment. Never touch the charger when your hands or feet are wet.

Allow ventilation around the charger when using it. Do not cover the charger with paper or other objects that will reduce cooling. Do not use the charger while it is inside a carrying case.

Connect the charger to a proper power source. The voltage requirements are found on the product case and/or packaging.

Do not use the charger if the wires become damaged. Do not attempt to service the unit. There are no serviceable parts inside. Replace the unit if it is damaged or exposed to excess moisture.

This charger is not a toy and should not be used by children or infirm persons without proper training or supervision.

Do not use it as a power source.

Unplug it before attempting to service or clean it.

### About the Battery

**CAUTION:** *This unit contains an internal Lithium Polymer battery. The battery can burst or explode, releasing hazardous chemicals. To reduce the risk of fire or burns, do not disassemble, crush, pierce or dispose of the battery or the instrument in fire or water, do not short circuit or short the contacts with a metal object.*

Use a specified charger approved by the **VDO** manufacturer and supplied with the device.

The tool must be returned to the factory for battery replacement.

**Opening the tool or tampering with the seal placed on the tool, if broken will void the warranty**

### Safety for Lithium Polymer battery use

**NEVER** leave the battery unattended during the charging process. The device must imperatively be placed on a non-flammable surface during charging (ceramic platter or metal box).

Charge the Lithium Polymer battery **ONLY** with the charger provided.

**NEVER** use a Ni-MH (Nickel Metal Hydride) type battery charger to charge a Lithium Polymer battery.

If the battery begins to overheat more than **60°C** (140° F), **STOP IMMEDIATELY** the charge. The battery should **NEVER** exceed **60°C** (140° F) during the charging process.

**NEVER** charge the battery immediately after use and while still hot. Leave it cool down to ambient temperature.

If you see some smoke or some liquid out of the battery, stop the charge immediately. Disconnect the charger and place the tool in an isolated area for at least 15 minutes. **DO NOT USE THE BATTERY AGAIN**, return the device to your seller.

Keep a fire extinguisher for electrical fires handy while charging the battery. In the unlikely event that the Lithium Polymer battery will ignite, **DO NOT** use water to extinguish the fire, take some sand or fire extinguisher described above.

It must neutralize the Lithium Polymer battery elements unusable. The neutralization



process must be performed with very strict security fit. It is recommended that you return us the tool, we will collect the battery out of use and gives to a specialized recycler.

**Do not dispose of Lithium Polymer batteries to the dustbin.**

The Lithium Polymer battery is not suitable for children under 14 years. Do not let a Lithium Polymer battery reach of children

To prevent leakage or other hazards, do not store batteries above **60°C** (140°F). Never leave the battery inside a car (for example) where the temperature could be very high or in a place where temperatures could exceed **60°C** (140°F). Store the battery in a dry place to avoid contact with liquid, whatever the type. Store the battery only on a nonflammable surface, heat resistant, non conductive and away from all flammable materials or sources. Always store the battery out of reach of children.

A Lithium Polymer battery should be stored with a minimum charge of **30%**. If you store completely discharged, it will quickly become unusable.

If you don't use the battery for a long time, you have to regularly charge the battery (every 6 months) to be over the minimum charge of **30%**.

If you don't follow these safety precautions, you may cause serious personal injury and damage to property; you may even cause a fire!


The **VDO** Company disclaims any responsibility for damage sustained in case of non compliance with these safety instructions.

Using a Lithium Polymer battery has a high risk of fires and can cause serious damages to property and persons, the user agrees to accept the risk and responsibility.

The **VDO** Company couldn't control the proper use of the battery for each customer (charge, discharge, storage etc.); it can not be held responsible for damage to persons and property.

## 7. RECYCLING

**Do not dispose of the rechargeable Lithium-Ion battery or the tool and/or it accessories to the dustbin.**



**These components must be collected and recycled.**



The crossed-out wheeled dustbin means that the product must be taken to separate collection at the product end-of life. This applies to your tool but also to any enhancements marked with this symbol. Do not dispose of these products as unsorted municipal waste. For further information, please contact VDO.

## Index

<b>A</b>	<b>P</b>
About .....49	Part menu .....26
Auto off .....48	Power on/off .....7
Automated search from VIN .....40	Power supply .....56
<b>B</b>	Printer .....52
Battery .....56	Printing Results.....52
Buzzer .....47	Program blank sensor.....28
<b>C</b>	Programmable sensor changes.....55
Caution .....4, 56	<b>R</b>
Charge.....51	Read TPMS DTC.....23
Charger .....56	Recycling .....57
Charging.....56	Relearn OBDII .....20
Check sensor.....9	<b>S</b>
Copy all sensors .....35, 37	Safety instructions .....3
Copy sensor .....32	Safety precautions .....56
Create new sensor .....34	SD card option .....54
Customer personalization.....16	SD card slot .....53
<b>D</b>	Search menu .....38
Docking station .....51	Security.....56
<b>E</b>	Service TPMS.....18
ECU Reprograming .....14	Settings.....44
Environment .....56	Slot SD .....53
<b>F</b>	Software installation.....54
Factory settings .....55	Software updating.....54
Format .....46	Specifications.....2
Function keys .....5	<b>T</b>
<b>H</b>	Tool update.....53
Help .....27	Training.....50
History .....43	Troubleshooting.....53
<b>I</b>	<b>U</b>
Icons .....6	Units .....46
<b>K</b>	USB Internet Options.....54
Keyfob test.....24	Use .....9
<b>L</b>	Use Instructions.....4
Language.....44	<b>V</b>
<b>M</b>	VIN.....12
Main Menu.....9	<b>W</b>
Miscellaneous.....51	Warning .....3
<b>O</b>	WebVT PC suite .....54
Operating instructions.....8	<b>Z</b>
Overview.....8	Zone .....48



